

LUXMAINER™

PRODUCT CATALOG





LED CEILING FIXTURES

Luxmainer's Ceiling Fixtures present a system which aims to provide aesthetics and light up the most important areas of any space. It provides energy-savings which are as of now unreachable by any other technology and a quality of light which is unrivalled.





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LD14-0100	3000K	5310341004496	LD14-0200	3000K	5310341004434
LD14-0110	4200K	5310341004502	LD14-0210	4200K	5310341004441
LD14-0120	6400K	5310341004519	LD14-0220	6400K	5310341004458
WATTS	1W		WATTS	1W	
EQ.WATTS	25W		EQ.WATTS	25W	
LUMINOUS FLUX	85 lm		LUMINOUS FLUX	85 lm	
VOLTAGE	220-240 V		VOLTAGE	220-240 V	
FREQUENCY	50-60 Hz		FREQUENCY	50-60 Hz	
MATERIAL	Die Cast Aluminum		MATERIAL	Die Cast Aluminum	
CRI	>80		CRI	>80	
PCS/CARTON	100 pcs		PCS/CARTON	100 pcs	
BEAM ANGLE	24°		BEAM ANGLE	24°	
LED TYPE	COB		LED TYPE	COB	
SERIES	Spotic		SERIES	Spotic	
LIFETIME	30.000 h		LIFETIME	30.000 h	
DIMENSION			DIMENSION		





SPOTLIGHT FIXTURES UNICASE SERIES



UNICASE
SERIES

Luxmainer's Spotlight Fixtures present a system which aims to provide aesthetics and light up the most important areas of a home. By providing energy-savings which are as of now unreachable by any other technology and a quality of light which is unrivalled.



MODEL	COLOR	EAN CODE
LD50-0100	WHITE	5310341003703



MODEL	COLOR	EAN CODE
LD51-0100	WHITE	5310341003710



MODEL	COLOR	EAN CODE
LD52-0100	WHITE	5310341003727

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	80 pcs	100 pcs	80 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION	CUTOUT: 100mm	CUTOUT: 80mm	CUTOUT: 80mm



MODEL	COLOR	EAN CODE
LD53-0100	WHITE	5310341003734

WATTS /

EQ.WATTS /

LUMINOUS
FLUX /

VOLTAGE /

FREQUENCY /

CAP-BASE /

CRI /

PCS/CARTON 80 pcs

PROPERTIES FIXTURE WITHOUT BULB

SUITABLE FOR MR16/GU10

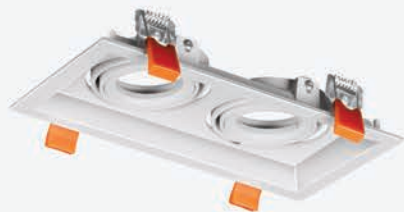
SERIES UNICASE SERIES

MATERIAL ALUMINIUM

DIMENSION

CUTOUT: 90mm





MODEL	COLOR	EAN CODE
LD46-0110	WHITE	5310341003642

MODEL	COLOR	EAN CODE
LD46-0120	BLACK	5310341003659

MODEL	COLOR	EAN CODE
LD47-0210	WHITE	5310341003666

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
BEAM ANGLE	/	/	/
SUITABLE FOR	/	/	/
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

LUXMAINER



MODEL	COLOR	EAN CODE
LD47-0220	BLACK	5310341003673



MODEL	COLOR	EAN CODE
LD48-0310	WHITE	5310341003680






MODEL	COLOR	EAN CODE
LD48-0320	BLACK	5310341003697

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
BEAM ANGLE	/	/	/
SUITABLE FOR	/	/	/
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD54-0100	WHITE	5310341003741	LD54-0200	BLACK	5310341003758	LD54-0300	WHITE	5310341003765

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	64 pcs	27 pcs	18 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION	 CUTOUT: 90x90	 CUTOUT: 90x165	 CUTOUT: 90x230

LUXMAINER



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD56-0110	WHITE	5310341003802	LD56-0120	BLACK	5310341003819	LD56-0130	GOLD	5310341003826

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	48 pcs	48 pcs	48 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			






MODEL	COLOR	EAN CODE
LD41-0850	WHITE & BLACK	5310341003567



MODEL	COLOR	EAN CODE
LD41-0105	WHITE	5310341003574






MODEL	COLOR	EAN CODE
LD42-0110	WHITE & BLACK	5310341003581

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

LUXMAINER



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD45-0100	WHITE	5310341003611	LD45-0110	SILVER	5310341003628	LD45-0120	BLACK	5310341003635


WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



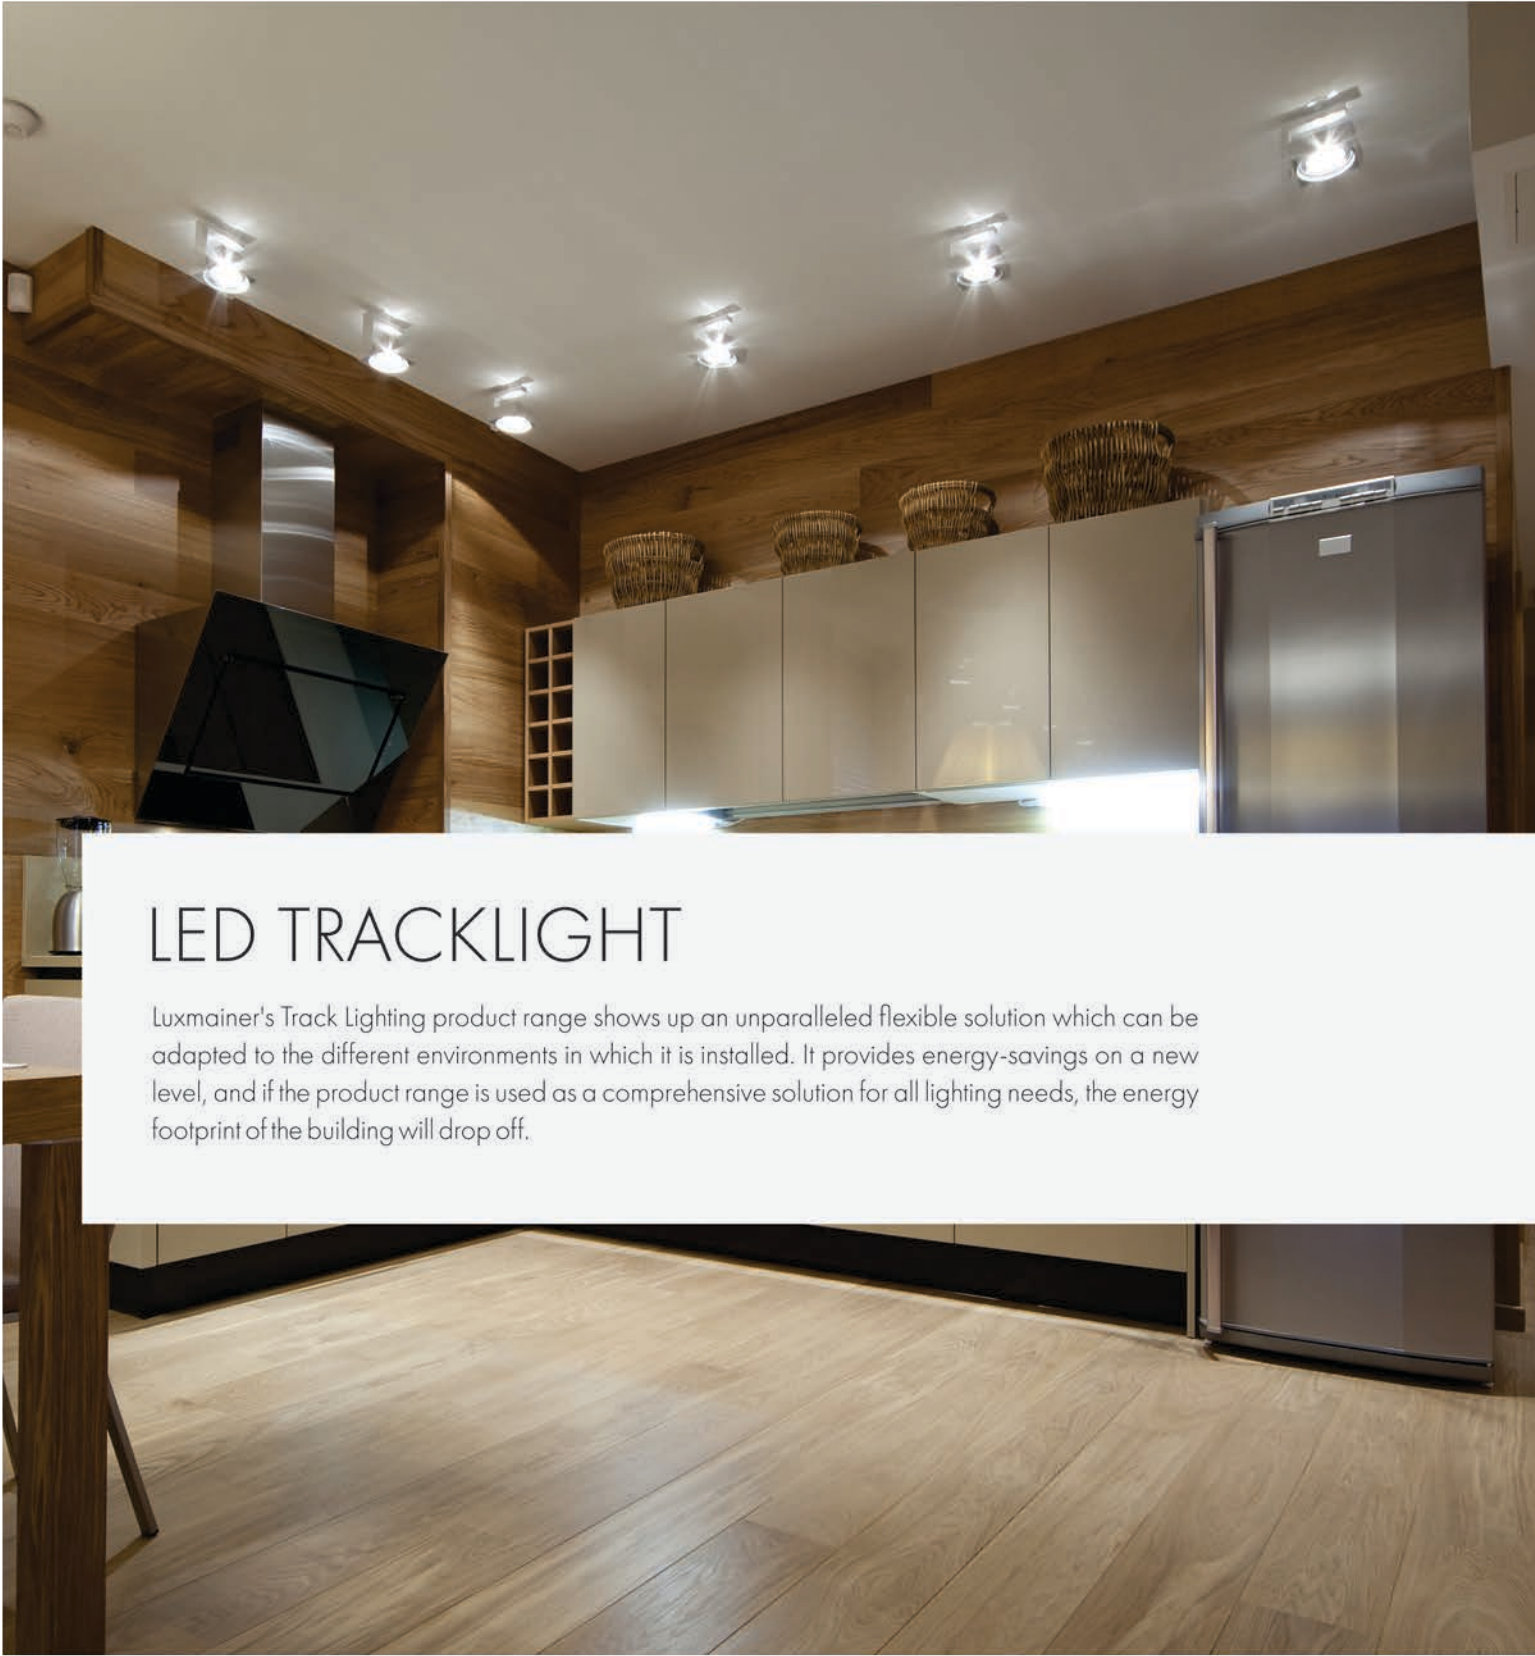
MODEL	COLOR	EAN CODE
LD43-0950	WHITE & BLACK	5310341003598



MODEL	COLOR	EAN CODE
LD44-0950	WHITE	5310341003604

WATTS	/	/
EQ.WATTS	/	/
LUMINOUS FLUX	/	/
VOLTAGE	/	/
FREQUENCY	/	/
CAP-BASE	/	/
CRI	/	/
PCS/CARTON	50 pcs	50 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM
DIMENSION		





LED TRACKLIGHT

Luxmainer's Track Lighting product range shows up an unparalleled flexible solution which can be adapted to the different environments in which it is installed. It provides energy-savings on a new level, and if the product range is used as a comprehensive solution for all lighting needs, the energy footprint of the building will drop off.



MODEL	COLOR TEMP.	EAN CODE	MODEL	COLOR TEMP.	EAN CODE	MODEL	COLOR TEMP.	EAN CODE
LT35-0700	5000K	5310341004465	LT35-0800	5000K	5310341004472	LT35-0900	5000K	5310341004489

WATTS	10W	20W	30W
EQ.WATTS	/	/	/
LUMINOUS FLUX	800 Lm	1600 Lm	2400 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	/	/	/
PROPERTIES	LED TRACK LIGHT	LED TRACK LIGHT	LED TRACK LIGHT
SUITABLE FOR	/	/	/
SERIES	INFISSI SHOPLINE	INFISSI SHOPLINE	INFISSI SHOPLINE
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

LUXMAINER



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD55-0110	BLACK	5310341003772	LD55-0120	WHITE	5310341003789	LD55-0130	GOLD	5310341003796

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	45 pcs	45 pcs	45 pcs
PROPERTIES	/	/	/
SUITABLE FOR	MR16/GU10	/	/
SERIES	INFISSI SHOPLINE	INFISSI SHOPLINE	INFISSI SHOPLINE
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD57-0110	WHITE	5310341003833	LD57-0120	BLACK	5310341003840	LD57-0130	GOLD	5310341003857

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	48 pcs	48 pcs	48 pcs
PROPERTIES	/	/	/
SUITABLE FOR	MR16/GU10	/	/
SERIES	INFISSI SHOPLINE	INFISSI SHOPLINE	INFISSI SHOPLINE
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

OUTDOOR SERIES

The Luxmainer Outdoor Fixtures line of products aims to provide a design that is adaptable to all outdoor spaces. By allowing you to choose the perfect lighting option for your outdoor needs, the Outdoor Fixtures have the added benefit of lowering costs tremendously by utilizing what is the forefront of energy-efficient technology.



MODEL	COLOR	EAN CODE
LR08-0100	3000K	5310341004298
LR08-0120	6400K	5310341004304

WATTS	1x3W
EQ.WATTS	/
LUMINOUS FLUX	85 Lm
VOLTAGE	220-240 V
FREQUENCY	50-60Hz
IP RATING	IP54
CRI	>80
PCS/CARTON	24 pcs
BEAM ANGLE	/
COLOR	/
SERIES	CRELEX
MATERIAL	ALUMINIUM



MODEL	COLOR	EAN CODE
LR08-0200	3000K	5310341004311
LR08-0220	6400K	5310341004328



MODEL	COLOR	EAN CODE
LR06-0500	3000K	5310341004410



MODEL	COLOR	EAN CODE
LR06-0600	3000K	5310341004427

WATTS	2x3W	1x3W	2x3W
EQ.WATTS	/	/	/
LUMINOUS FLUX	160 Lm	160 Lm	300 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	IP54	IP54	IP54
CRI	>80	>80	>80
PCS/CARTON	20 pcs	20 pcs	18 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	CRELEX	CRELEX	CRELEX
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

LUXMAINER



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LR09-0100	3000K	5310341004335	LR10-0100	3000K	5310341004359	LR13-0105	BLACK	5310341004397
LR09-0120	6400K	5310341004342	LR10-0120	6400K	5310341004366			

WATTS	1x6W	1x6W	1xGU10
EQ.WATTS	/	/	Max 35 W
LUMINOUS FLUX	242 Lm	242 Lm	/
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	IP54	IP54	IP65
CRI	>80	>80	>80
PCS/CARTON	12 pcs	18 pcs	18 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	CRELEX	CRELEX	CRELEX
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE
LR14-0105	BLACK	5310341004403



MODEL	COLOR	EAN CODE
LR11-0105	BLUE	5310341004373



MODEL	COLOR	EAN CODE
LR12-0105	BLUE	5310341004380

WATTS	1xGU10	1xGU10	1xGU10
EQ.WATTS	Max 35 W	Max 35 W	Max 35 W
LUMINOUS FLUX	/	/	/
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	IP65	IP65	IP65
CRI	>80	>80	>80
PCS/CARTON	18 pcs	18 pcs	18 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	CRELEX	CRELEX	CRELEX
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

COB LED
DOWNLIGHT
SURFACE
SERIES


In Luxmainer's drive to improve the lives of its customers, we have managed to create a line of products that not only strives to minimize energy use, but also human resources spent in maintenance. The Downlight series provides energy-efficiency, comfortable lighting and a utilitarian design that doesn't degrade performance.



MODEL	COLOR	EAN CODE
LD25-0100	3000K	5310341003505
LD25-0110	4200K	5310341003512
LD25-0120	6400K	5310341003529

WATTS	7W
EQ.WATTS	/
LUMINOUS FLUX	560 Lm
VOLTAGE	220-240 V
FREQUENCY	50-60Hz
IP RATING	/
CRI	>80
PCS/CARTON	50 pcs
BEAM ANGLE	/
COLOR	/
SERIES	EPISTAR
MATERIAL	ALUMINIUM





MODEL	COLOR	EAN CODE
LD28-0100	3000K	5310341003536
LD28-0110	4200K	5310341003543
LD28-0120	6400K	5310341003550

MODEL	COLOR	EAN CODE
LD29-0100	6000K	5310341003871
LD29-0110	6000K	5310341003888
LD29-0120	6000K	5310341003895

MODEL	COLOR	EAN CODE
LD29-0200	6000K	5310341004663
LD29-0210	6000K	5310341004670
LD29-0220	6000K	5310341004687

WATTS	10W	15/25/30W	15/25/30W
EQ.WATTS	/	/	/
LUMINOUS FLUX	800 Lm	/	/
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	/	/	/
CRI	>80	>80	>80
PCS/CARTON	50 pcs	24/ 12 pcs	24/ 12 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	EPISTAR	EPISTAR	EPISTAR
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

MINIMAL SERIES

The Luxmainer Minimmall products seek to provide the best possible detail lighting for indoor spaces. Allow your staircases, metal fixtures, and other decorative elements to shine out, as the Minimmall series of products breathes a new life into them. The functional gains of highlighting these elements are offset by the tremendous impact they can have on creating a pleasant lighting atmosphere.



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD26-0100	3000K	5310341003901	LD40-0100	3000K	5310341004069
LD26-0120	6400K	5310341003918			

WATTS	1W	3W
EQ.WATTS	/	/
LUMINOUS FLUX	/	/
VOLTAGE	28-265 V	28-265 V
FREQUENCY	50-60Hz	50-60Hz
IP RATING	IP20	IP20
CRI	>80	>80
PCS/CARTON	100 pcs	50 pcs
BEAM ANGLE	/	/
COLOR	/	/
SERIES	MINIMALL	MINIMALL
MATERIAL	ALUMINIUM	ALUMINIUM



MODEL	COLOR	EAN CODE
LD33-0100	3000K	5310341003925
LD33-0120	6400K	5310341003932

MODEL	COLOR	EAN CODE
LD34-0100	3000K	5310341003949
LD34-0120	3000K	5310341003956


MODEL	COLOR	EAN CODE
LD30-0100	3000K	5310341003963
LD30-0120	3000K	5310341003970

WATTS	1W	1W	1W
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	28-265 V	28-265 V	28-265 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	IP20	IP20	IP20
CRI	>80	>80	>80
PCS/CARTON	100 pcs	100 pcs	100 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	MINIMALL	MINIMALL	MINIMALL
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD31-0100	3000K	5310341003987	LD32-0100	3000K	5310341004007			
LD31-0120	6400K	5310341003994	LD32-0120	6400K	5310341004014	LD38-0120	6400K	5310341004021

WATTS	1W	1W	3W
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	28-265 V	28-265 V	28-265 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	IP20	IP20	IP20
CRI	>80	>80	>80
PCS/CARTON	100 pcs	100 pcs	50 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	MINIMALL	MINIMALL	MINIMALL
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE
LD37-0120	6400K	5310341004038



MODEL	COLOR	EAN CODE
LD36-0100	3000K	5310341004045



MODEL	COLOR	EAN CODE
LD39-0100	3000K	5310341004052

WATTS	3W	1W	1W
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	28-265 V	28-265 V	28-265 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	IP20	IP20	IP20
CRI	>80	>80	>80
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	MINIMALL	MINIMALL	MINIMALL
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

EMERGENCY LINE

The Emergency Line of Luxmainer products shows up as a stop-gap solution for all unexpected needs of lighting, as well as a solution of comfortable lighting for outdoor areas or as a provider of night-time soft lighting in order to facilitate easier reading.



MODEL	COLOR	EAN CODE
LX01-1000	5000K	5310341004571

WATTS	4W
EQ.WATTS	/
LUMINOUS FLUX	/
VOLTAGE	220-240 V
FREQUENCY	50-60Hz
IP RATING	/
CRI	>80
PCS/CARTON	16 pcs
BEAM ANGLE	/
DURATION	3.5 Hours
SERIES	RECHARGEABLE
MATERIAL	ALUMINIUM





MODEL	COLOR	EAN CODE
LX01-1100	5000K	5310341004601



MODEL	COLOR	EAN CODE
LX01-1300	5000K	5310341004588



MODEL	COLOR	EAN CODE
LX01-1400	5000K	5310341004625

WATTS	4W	6W	4W
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	/	/	/
CRI	>80	>80	>80
PCS/CARTON	150 pcs	6 pcs	20 pcs
PROPERTIES	/	/	/
DURATION	2/4 Hours	11/18 Hours	7 Hours
SERIES	RECHARGEABLE	RECHARGEABLE	RECHARGEABLE
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR TREMP	MODEL	COLOR TREMP	MODEL	COLOR TREMP
LX01-0400	5000K	LX01-0500	5000K	LX01-0600	5000K

LED TYPE	SMD LED	SMD LED	SMD LED
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	/	/	/
CRI	>80	>80	>80
PCS/CARTON	10	10	10
ANGLE	/	/	/
ON/OFF	/	/	/
DURATION TIME	50h	10h	20h

DIMENSION



MODEL	COLOR TREMP	MODEL	COLOR TREMP	MODEL	COLOR TREMP
LX01-0700	5000K	LX01-0800	5000K	LX01-0900	5000K
LED TYPE	SMD LED		SMD LED		SMD LED
EQ.WATTS	/		/		/
LUMINOUS FLUX	/		/		/
VOLTAGE	220-240 V		220-240 V		220-240 V
FREQUENCY	50-60 Hz		50-60 Hz		50-60 Hz
CAP-BASE	/		/		/
CRI	>80		>80		>80
PCS/CARTON	10		10		10
ANGLE	/		/		/
ON/OFF	/		/		/
DURATION TIME	20 h		20 h		5 h
DIMENSION					

