

LUXMAINER™

PRODUCT CATALOG





LED BULBS	4
LED GLASS TUBE	18
SMD LED DOWN LIGHT SERIES	20
SMD LED PANEL LIGHT SERIES	21
SMD SURFACE LED PANEL LIGHT SERIES	24
SMD SURFACE LED DOWNLIGHT SERIES	26
SMD LED DOWNLIGHT SERIES	29
LED CEILING FIXTURES	32
COB LED DOWNLIGHT SERIES	35
COB LED DOWNLIGHT SURFACE SERIES	39
WATERPROOF LED LIGHTING FIXTURES	40
LED WAL-LAMP SERIES	43
LED FLOODLIGHT SERIES	46
CYCLOP SERIES	50
MINIMALL SERIES	54
LED PANEL LIGHT SERIES	58
SPOTLIGHT FIXTURES / UNICASE SERIES	61
MODULAR SERIES	76
LED TRACKLIGHT / SHOPLINE SERIES	83
LED DOWNLIGHT SERIES	90
LED STRIPS	92
OUTDOOR SERIES	94
LED POWER SUPPLY	103
AMPLIFIERS	107
CONTROLLERS	109
SENSOR SERIES	111
WALL WASHERS	115
ECO STREET SERIES	117
EMERGENCY LINE	119
LED HIGHBAY SERIES	126

The LED products shown in this catalog are all compliant with:

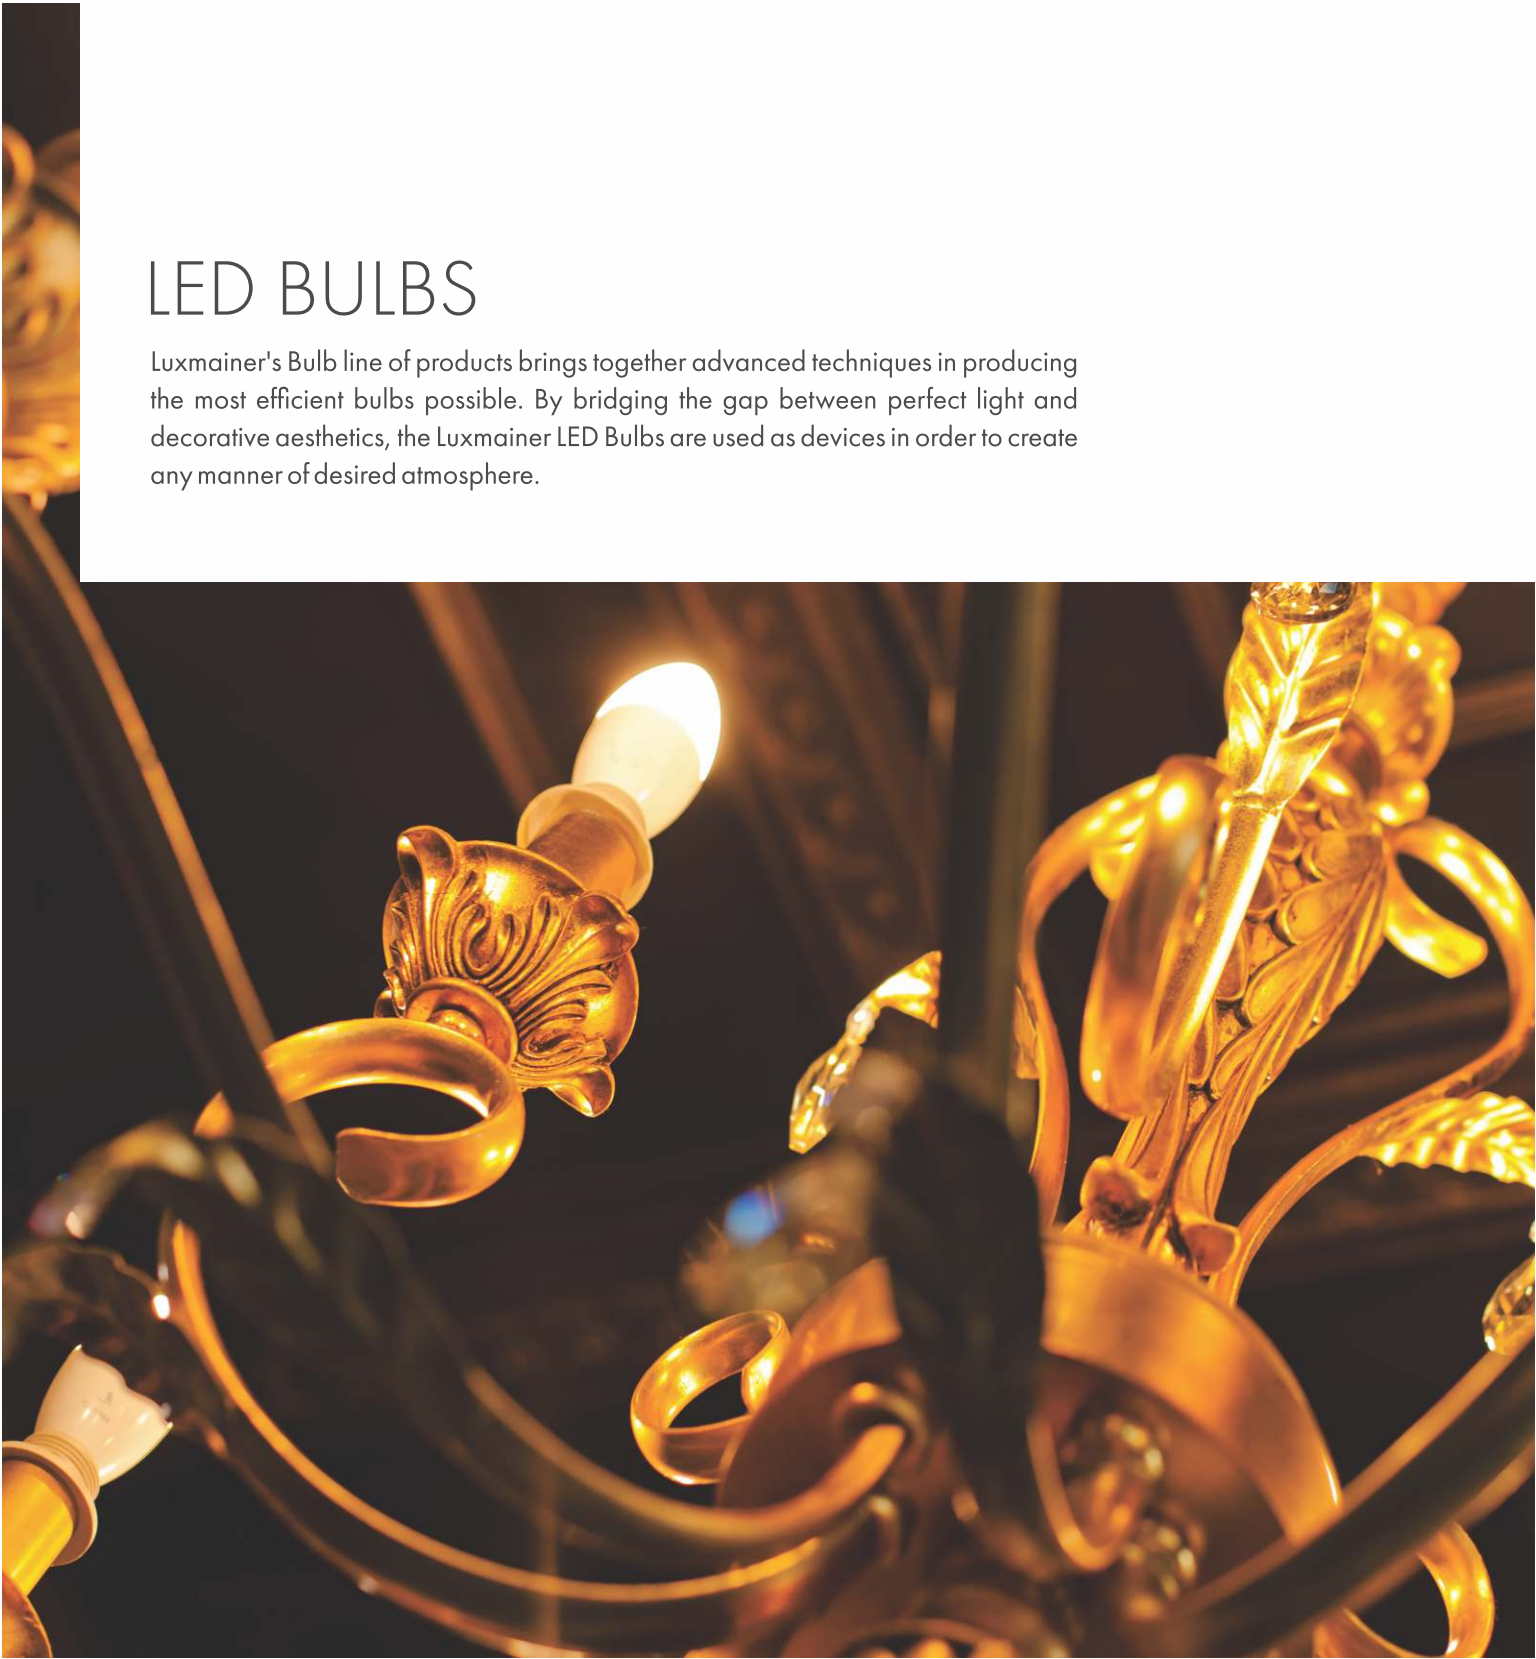


LUXMAINER™

The Luxmainer lighting brand has focused on improving and providing the most energy-efficient lighting solutions. In striving to provide a comprehensive set of solutions for almost all possible lighting needs, Luxmainer has developed lines that fulfill everyday niches, such as home and office lighting, as well as specialized ones, such as warehouse and manufacturing. Luxmainer's line of products is also differentiated in indoor and outdoor specialized products, some of which can withstand the elements with ease.




LED BULBS

Luxmainer's Bulb line of products brings together advanced techniques in producing the most efficient bulbs possible. By bridging the gap between perfect light and decorative aesthetics, the Luxmainer LED Bulbs are used as devices in order to create any manner of desired atmosphere.








MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA01-0410	3000K	5310341000016	LA02-0410	3000K	5310341000030	LA02-0610	3000K	5310341000054
						LA02-0611	4200K	5310341000061
LA01-0412	6400K	5310341000023	LA02-0412	6400K	5310341000047	LA02-0612	6400K	5310341000078

WATTS	4W	4W	6W
EQ.WATTS	30W	30W	50W
LUMINOUS FLUX	320 Lm	320 Lm	470 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	E14	E14	E14
CRI	>80	>80	>80
PCS/CARTON	100 pcs	100 pcs	100 pcs
BEAM ANGLE	270°	270°	270°
ON/OFF	<15000	<15000	<15000
SERIES	C37T	C35	C35
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			




MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA03-0410	3000K	5310341000085	LA03-0610	3000K	5310341000108	LA04-0420	3000K	5310341000139
			LA03-0611	4200K	5310341000115			
LA03-0412	6400K	5310341000092	LA03-0612	6400K	5310341000122	LA04-0422	6400K	5310341000146

WATTS	4W	6W	4W
EQ.WATTS	30W	50W	30W
LUMINOUS FLUX	320 lm	470 lm	320 lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	E14	E14	E27
CRI	>80	>80	>80
PCS/CARTON	100 pcs	100 pcs	100 pcs
BEAM ANGLE	270°	270°	270°
ON/OFF	<15000	<15000	<15000
SERIES	P45	P45	G45
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			





MODEL	COLOR TEMP	EAN CODE
LA04-0620	3000K	5310341000153
LA04-0621	4200K	5310341000160
LA04-0622	6400K	5310341000177

WATTS	6W
EQ.WATTS	50W
LUMINOUS FLUX	470 Lm
VOLTAGE	220-240 V
FREQUENCY	50-60 Hz
CAP-BASE	E27
CRI	>80
PCS/CARTON	100 pcs
BEAM ANGLE	270°
ON/OFF	<15000
SERIES	G45
LIFETIME	30.000 h
DIMENSION	








MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA04-0820	3000K	5310341000184	LA04-1020	3000K	5310341000214
LA04-0821	4200K	5310341000191	LA04-1021	4200K	5310341000221
LA04-0822	6400K	5310341000207	LA04-1022	6400K	5310341000238

WATTS	8W	10W
EQ.WATTS	55W	60W
LUMINOUS FLUX	650 Lm	806 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
CAP-BASE	E27	E27
CRI	>80	>80
PCS/CARTON	50 pcs	50 pcs
BEAM ANGLE	270°	270°
ON/OFF	<15000	<15000
SERIES	A60	A60
LIFETIME	30.000 h	30.000 h
DIMENSION		






MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA04-1220	3000K	5310341000245	LA04-1520	3000K	5310341000269	LA20-1020	3000K	5310341000504
LA04-1222	6400K	5310341000252	LA04-1522	6400K	5310341000276	LA20-1022	6400K	5310341000511

WATTS	12W	15W	10W
EQ.WATTS	75W	100W	60W
LUMINOUS FLUX	1050 Lm	1250 Lm	806 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	E27	E27	E27
CRI	>80	>80	>80
PCS/CARTON	50 pcs	50 pcs	50 pcs
BEAM ANGLE	270°	270°	270°
ON/OFF	<15000	<15000	<15000
SERIES	A60	A65	A60
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			






MODEL	COLOR TEMP	EAN CODE
LA05-2020	3000K	5310341000283
LA05-2022	6400K	5310341000290

WATTS	20W
EQ.WATTS	130W
LUMINOUS FLUX	1800 Lm
VOLTAGE	220-240 V
FREQUENCY	50-60 Hz
CAP-BASE	E27
CRI	>80
PCS/CARTON	50 pcs
BEAM ANGLE	270°
ON/OFF	<15000
SERIES	G120
LIFETIME	30.000 h
DIMENSION	



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA06-4020	3000K	5310341000306	LA07-0210	3000K	5310341000320	LA08-0210	3000K	5310341000351
			LA07-0410	3000K	5310341000337	LA08-0410	3000K	5310341000368
LA06-4022	6400K	5310341000313	LA07-0412	6400K	5310341000344	LA08-0412	6400K	5310341000375




WATTS	40W	2/4W	2/4W
EQ.WATTS	220W	40/60W	40/60W
LUMINOUS FLUX	3200 Lm	250/450 Lm	250/450 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	E27	E14	E14
CRI	>80	>80	>80
PCS/CARTON	20 pcs	100 pcs	100 pcs
BEAM ANGLE	200°	300°	300°
ON/OFF	<15000	<15000	<15000
SERIES	A120	C35T	C35
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA09-0220	3000K	5310341000382	LA10-0220	3000K	5310341000412	LA11-0620	3000K	5310341000443
LA09-0420	3000K	5310341000399	LA10-0420	3000K	5310341000429	LA11-0622	6400K	5310341000450
LA09-0422	6400K	5310341000405	LA10-0422	6400K	5310341000436			

WATTS	2/4W	2/4W	6W
EQ.WATTS	40/60W	40/60W	60W
LUMINOUS FLUX	250/450 Lm	250/450 Lm	660 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	E14	E27	E27
CRI	>80	>80	>80
PCS/CARTON	100 pcs	100 pcs	50 pcs
BEAM ANGLE	300°	300°	300°
ON/OFF	<15000	<15000	<15000
SERIES	P45	G45	A60
LIFETIME	30.000 h	30.000 h	30.000 h

DIMENSION








MODEL	COLOR TEMP	EAN CODE
LA11-0820	3000K	5310341000467
LA11-0822	6400K	5310341000474


MODEL	COLOR TEMP	EAN CODE
LA12-0820	3000K	5310341000481

MODEL	COLOR TEMP	EAN CODE
LA13-0820	3000K	5310341000498

WATTS	8W	8W	8W
EQ.WATTS	75W	75W	75W
LUMINOUS FLUX	750 Lm	750 Lm	750 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	E27	E27	E27
CRI	>80	>80	>80
PCS/CARTON	50 pcs	50 pcs	50 pcs
BEAM ANGLE	300°	270°	270°
ON/OFF	<15000	<15000	<15000
SERIES	A60	G95	G125
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			






MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA34-4500	3000K	5310341005509	LA33-0340	3000K	5310341000566
LA34-4520	6400K	5310341005516	LA33-0342	6400K	5310341000573



WATTS	4,5W	3W
EQ.WATTS	30W	35W
LUMINOUS FLUX	400 Lm	220 Lm
VOLTAGE	12V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
CAP-BASE	E14	G4
CRI	>80	>80
PCS/CARTON	200 pcs	200 pcs
BEAM ANGLE	360°	360°
ON/OFF	<15000	<15000
SERIES	G4	G4
LIFETIME	30.000 h	30.000 h
DIMENSION		



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA32-0240	3000K	5310341000528	LA33-0240	3000K	5310341000542	LA33-0390	3000K	5310341000580
LA32-0242	6400K	5310341000535	LA33-0242	6400K	5310341000559	LA33-0392	6400K	5310341000597




WATTS	2W	2W	3W
EQ.WATTS	20W	20W	35W
LUMINOUS FLUX	130 Lm	130 Lm	220 Lm
VOLTAGE	12 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	G4	G4	G9
CRI	>80	>80	>80
PCS/CARTON	200 pcs	200 pcs	200 pcs
BEAM ANGLE	360°	360°	360°
ON/OFF	<15000	<15000	<15000
SERIES	G4	G4	G9
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			



					
MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA40-0350	3000K	5310341000603	LA40-0360	3000K	5310341000627
LA40-0352	6400K	5310341000610	LA40-0362	6400K	5310341000634
WATTS	4W		4W		
EQ.WATTS	35W		35W		
LUMINOUS FLUX	320 Lm		320 Lm		
VOLTAGE	220-240 V		220-240 V		
FREQUENCY	50-60 Hz		50-60 Hz		
CAP-BASE	GU10		GU5.3		
CRI	>80		>80		
PCS/CARTON	100 pcs		100 pcs		
BEAM ANGLE	110°		110°		
ON/OFF	<15000		<15000		
SERIES	MR16		MR16		
LIFETIME	30.000 h		30.000 h		
DIMENSION					



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA40-0650	3000K	5310341000641	LA40-0660	3000K	5310341000672	LA21-0550	3000K	5310341000702
LA40-0651	4200K	5310341000658	LA40-0661	4200K	5310341000689	LA21-0551	4200K	5310341000719
LA40-0652	6400K	5310341000665	LA40-0662	6400K	5310341000696	LA21-0552	6400K	5310341000726

WATTS	6W	6W	6W
EQ.WATTS	50W	50W	50W
LUMINOUS FLUX	480 Lm	480 Lm	480 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	GU10	GU5.3	GU10
CRI	>80	>80	>80
PCS/CARTON	100 pcs	100 pcs	100 pcs
BEAM ANGLE	110°	110°	110°
ON/OFF	<15000	<15000	<15000
SERIES	MR16	MR16	MR16
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LA50-0120	3000K	5310341000733	LA30-0650	3000K	5310341000757	LA30-1250	3000K	5310341000788
LA50-0122	6400K	5310341000740	LA30-0651	4200K	5310341000764	LA30-1251	4200K	5310341000795
			LA30-0652	6400K	5310341000771	LA30-1252	6400K	5310341000801

WATTS	1.5W	9W	18W
EQ.WATTS	25W	18W	36W
LUMINOUS FLUX	150 Lm	900 Lm	1700 Lm
VOLTAGE	12 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	Two Side Cable	G13	G13
CRI	>80	>80	>80
PCS/CARTON	200 pcs	30 pcs	30 pcs
BEAM ANGLE	160°	260°	260°
ON/OFF	15.000	15.000	15.000
SERIES	Led module	Led glass tube	Led glass tube
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			






LED GLASS TUBES

Luxmainer's Glass Tube line of products brings together advanced techniques in producing the most efficient glass tubes possible by utilizing LED technology in order to increase energy-efficiency. By bridging the gap between perfect light and decorative aesthetics, the Luxmainer LED Glass Tubes are used as devices in order to create any manner of desired atmosphere.



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP01-0800	3000K	5310341000818	LP01-1200	3000K	5310341000849	LP01-2000	3000K	5310341000870
LP01-0810	4200K	5310341000825	LP01-1210	4200K	5310341000856	LP01-2010	4200K	5310341000887
LP01-0820	6400K	5310341000832	LP01-1220	6400K	5310341000863	LP01-2020	6400K	5310341000894



WATTS	8W	12W	20W
EQ.WATTS	40W	60W	100W
LUMINOUS FLUX	940 Lm	1050 Lm	1750Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80	>80
PCS/CARTON	50 pcs	20 pcs	20 pcs
BEAM ANGLE	120°	120°	120°
LED TYPE	SMD	SMD	SMD
SERIES	Backlight	Backlight	Backlight
LIFETIME	30,000 h	30,000 h	30,000 h
DIMENSION			

SMD LED DOWNLIGHT SERIES

In Luxmainer's drive to improve the lives of its customers, we have managed to create a line of products that not only strives to minimize energy use, but also human resources spent in maintenance. The Downlight series provides energy-efficiency, comfortable lighting and a utilitarian design that doesn't degrade performance.





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP01-2500	3000K	5310341000900	LD21-0300	3000K	5310341001877
LP01-2510	4200K	5310341000917	LD21-0310	4200K	5310341001884
LP01-2520	6400K	5310341000924	LD21-0320	6400K	5310341001891

WATTS	25W	3W
EQ.WATTS	125W	15W
LUMINOUS FLUX	2500 Lm	210 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80
PCS/CARTON	20 pcs	100 pcs
BEAM ANGLE	120°	70°
LED TYPE	SMD	SMD
SERIES	Backlight	Micro
LIFETIME	30,000 h	30,000 h
DIMENSION		



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP02-0300	3000K	5310341000931	LP02-0600	3000K	5310341000962
LP02-0310	4200K	5310341000948	LP02-0610	4200K	5310341000979
LP02-0320	6400K	5310341000955	LP02-0620	6400K	5310341000986




SMD LED PANELLIGHT SERIES

WATTS	3W	6W
EQ.WATTS	15W	30W
LUMINOUS FLUX	165 Lm	408 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80
PCS/CARTON	100 pcs	50 pcs
BEAM ANGLE	120°	120°
LED TYPE	SMD	SMD
SERIES	Extra Slim	Extra Slim
LIFETIME	30.000 h	30.000 h
DIMENSION		

The Luxmainer LED Panel line of products provides a perfect fit for both new buildings, and spaces that are being renovated. It provides a substantial increase in the quality of light, while more than halving maintenance and upkeep costs. As a singular surface of light, it provides incredible lumination, and its homogeneous brightness washes over surfaces while looking ultra modern. With various capabilites, from remote control to dimming, the LED Panels have something for every situation.



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP02-1200	3000K	5310341000993	LP02-2000	3000K	5310341001020	LP02-2400	3000K	5310341001051
LP02-1210	4200K	5310341001006	LP02-2010	4200K	5310341001037	LP02-2410	4200K	5310341001068
LP02-1220	6400K	5310341001013	LP02-2020	6400K	5310341001044	LP02-2420	6400K	5310341001075

WATTS	12W	20W	24W
EQ.WATTS	60W	100W	120W
LUMINOUS FLUX	910 Lm	1500 Lm	2100Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80	>80
PCS/CARTON	40 pcs	20 pcs	10 pcs
BEAM ANGLE	120°	120°	120°
LED TYPE	SMD	SMD	SMD
SERIES	Extra Slim	Extra Slim	Extra Slim
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP03-0300	3000K	5310341001082	LP03-0600	3000K	5310341001112	LP03-1200	3000K	5310341001143
LP03-0310	4200K	5310341001099	LP03-0610	4200K	5310341001129	LP03-1210	4200K	5310341001150
LP03-0320	6400K	5310341001105	LP03-0620	6400K	5310341001136	LP03-1220	6400K	5310341001167

WATTS

3W

6W

12W

EQ.WATTS

15W

30W

60W

LUMINOUS FLUX

165 Lm

408 Lm

910 Lm

VOLTAGE

220-240 V

220-240 V

220-240 V

FREQUENCY

50-60 Hz

50-60 Hz

50-60 Hz

MATERIAL

Die Cast Aluminum

Die Cast Aluminum

Die Cast Aluminum

CRI

>80

>80

>80

PCS/CARTON

100 pcs

50 pcs

40 pcs

BEAM ANGLE

120°

120°

120°

LED TYPE

SMD

SMD

SMD

SERIES

Extra Slim

Extra Slim

Extra Slim




LIFETIME

30.000 h

30.000 h



30.000 h

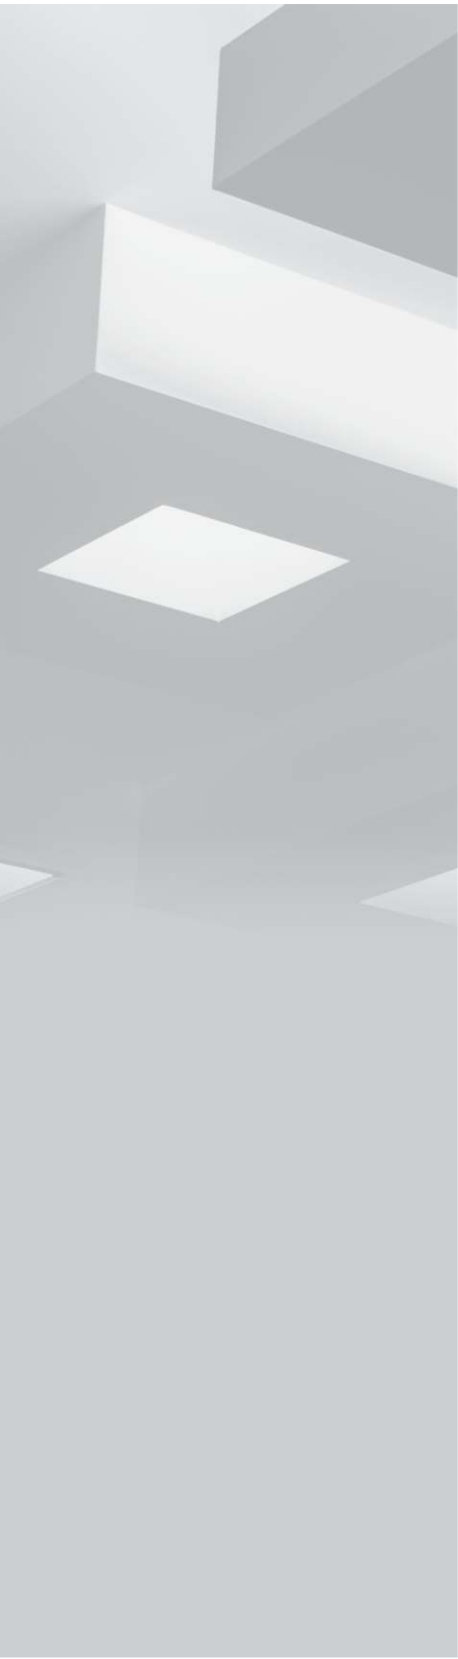
DIMENSION





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP03-2000	3000K	5310341001174	LP03-2400	3000K	5310341001204
LP03-2010	4200K	5310341001181	LP03-2410	4200K	5310341001211
LP03-2020	6400K	5310341001198	LP03-2420	6400K	5310341001228

WATTS	20W	24W
EQ.WATTS	100W	120W
LUMINOUS FLUX	1500 Lm	2100 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80
PCS/CARTON	20 pcs	10 pcs
BEAM ANGLE	120°	120°
LED TYPE	SMD	SMD
SERIES	Extra Slim	Extra Slim
LIFETIME	30.000 h	30.000 h
DIMENSION		



SMD SURFACE LED PANEL LIGHT SERIES

The Luxmainer LED Panel line of products provides a perfect fit for both new buildings, and spaces that are being renovated. It provides a substantial increase in the quality of light, while more than halving maintenance and upkeep costs. As a singular surface of light, it provides incredible lumination, and its homogeneous brightness washes over surfaces while looking ultra modern. With various capabilites, from remote control to dimming, the LED Panels have something for every situation.





MODEL	COLOR TEMP	EAN CODE
LP04-0600	3000K	5310341001235
LP04-0610	4200K	5310341001242
LP04-0620	6400K	5310341001259



WATTS	6W
EQ.WATTS	30W
LUMINOUS FLUX	408 Lm
VOLTAGE	220-240 V
FREQUENCY	50-60 Hz
MATERIAL	Die Cast Aluminum
CRI	>80
PCS/CARTON	50 pcs
BEAM ANGLE	120°
LED TYPE	SMD
SERIES	Extra Slim
LONGLIFE	30,000 h
DIMENSION	120 30






MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP04-1200	3000K	5310341001266	LP04-2000	3000K	5310341001297	LP04-2400	3000K	5310341001327
LP04-1210	4200K	5310341001273	LP04-2010	4200K	5310341001303	LP04-2410	4200K	5310341001334
LP04-1220	6400K	5310341001280	LP04-2020	6400K	5310341001310	LP04-2420	6400K	5310341001341

WATTS	12W	20W	24W
EQ.WATTS	60W	100W	120W
LUMINOUS FLUX	910 Lm	1500 Lm	2100 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80	>80
PCS/CARTON	20 pcs	20 pcs	10 pcs
BEAM ANGLE	120°	120°	120°
LED TYPE	SMD	SMD	SMD
SERIES	Extra Slim	Extra Slim	Extra Slim
LOGLIFE	30.000 h	30.000 h	30.000 h
DIMENSION			



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP05-0600	3000K	5310341001358	LP05-1200	3000K	5310341001389	LP05-2000	3000K	5310341001419
LP05-0610	4200K	5310341001365	LP05-1210	4200K	5310341001396	LP05-2010	4200K	5310341001426
LP05-0620	6400K	5310341001372	LP05-1220	6400K	5310341001402	LP05-2020	6400K	5310341001433


WATTS	6W	12W	20W
EQ.WATTS	30W	60W	100W
LUMINOUS FLUX	408 Lm	960 Lm	1500 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80	>80
PCS/CARTON	50 pcs	20 pcs	20 pcs
BEAM ANGLE	120°	120°	120°
LED TYPE	SMD	SMD	SMD
SERIES	Extra Slim	Extra Slim	Extra Slim
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			



MODEL	COLOR TEMP	EAN CODE
LP05-2400	3000K	5310341001440
LP05-2410	4200K	5310341001457
LP05-2420	6400K	5310341001464

SMD SURFACE LED DOWNLIGHT SERIES

In Luxmainer's drive to improve the lives of its customers, we have managed to create a line of products that not only strives to minimize energy use, but also human resources spent in maintenance. The Downlight series provides energy-efficiency, comfortable lighting and a utilitarian design that doesn't degrade performance.

WATTS	24W
EQ.WATTS	120W
LUMINOUS FLUX	2100 Lm
VOLTAGE	220-240 V
FREQUENCY	50-60 Hz
MATERIAL	Die Cast Aluminum
CRI	>80
PCS/CARTON	10 pcs
BEAM ANGLE	120°
LED TYPE	SMD
SERIES	Extra Slim
LIFETIME	30.000 h
DIMENSION	





BLUE
SIDELIGHT






BLUE
SIDELIGHT



BLUE
SIDELIGHT

MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP06-0520	6400K	5310341001471	LP06-0920	6400K	5310341001488	LP06-1620	6400K	5310341001495


WATTS	5W	9W	16W
EQ.WATTS	25W	45W	80W
LUMINOUS FLUX	400 Lm	720 Lm	1280 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENEY	50-60 Hz	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80	>80
PCS/CARTON	50 pcs	40 pcs	20 pcs
BEAM ANGLE	120°	120°	120°
LED TYPE	SMD	SMD	SMD
SERIES	Side Light	Side Light	Side Light
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			



SMD LED SIDE LIGHT DOWNLIGHT SERIES

In Luxmainer's drive to improve the lives of its customers, we have managed to create a line of products that not only strives to minimize energy use, but also human resources spent in maintenance. The Downlight series provides energy-efficiency, comfortable lighting and a utilitarian design that doesn't degrade performance.

MODEL	COLOR TEMP	EAN CODE
LP06-2420	6400K	5310341001501

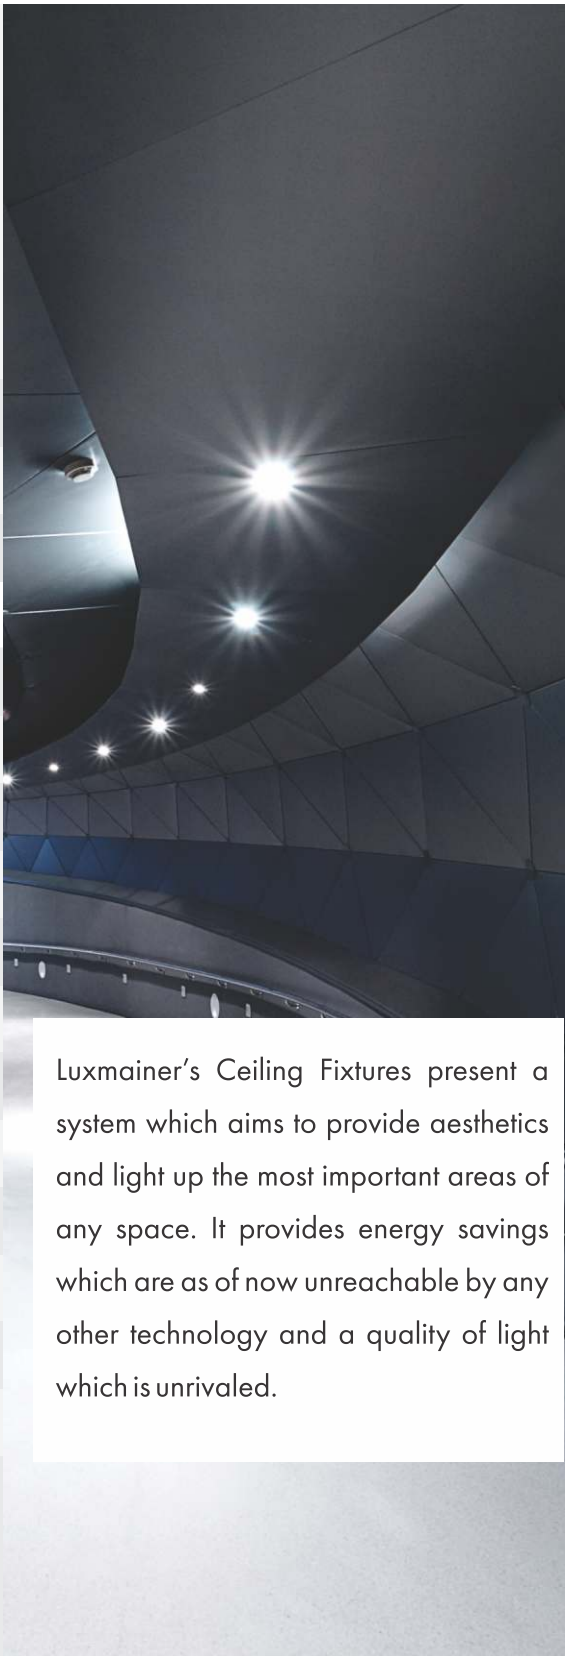
WATTS	24W
EQ.WATTS	120W
LUMINOUS FLUX	1900 Lm
VOLTAGE	220-240 V
FREQUENEY	50-60 Hz
MATERIAL	Die Cast Aluminum
CRI	>80
PCS/CARTON	20 pcs
BEAM ANGLE	120°
LED TYPE	SMD
SERIES	Side Light
LIFETIME	/
DIMENSION	





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LD 14-0100	3000K	5310341004496	LD 14-0200	3000K	5310341004434
LD 14-0110	4200K	5310341004502	LD 14-0210	4200K	5310341004441
LD 14-0120	6400K	5310341004519	LD 14-0220	6400K	5310341004458

WATTS	1W	1W
EQ.WATTS	8W	8W
LUMINOUS FLUX	85 Lm	85 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80
PCS/CARTON	100 pcs	100 pcs
BEAM ANGLE	24°	24°
LED TYPE	COB	COB
SERIES	Spotic	Spotic
LIFETIME	30.000 h	30.000 h
DIMENSION		



Luxmainer’s Ceiling Fixtures present a system which aims to provide aesthetics and light up the most important areas of any space. It provides energy savings which are as of now unreachable by any other technology and a quality of light which is unrivaled.





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LD15-0100	3000K	5310341001518	LD15-0200	3000K	5310341001549
LD15-0110	4200K	5310341001525	LD15-0210	4200K	5310341001556
LD15-0120	6400K	5310341001532	LD15-0220	6400K	5310341001563

WATTS	3W	3W
EQ.WATTS	24W	24W
LUMINOUS FLUX	240 Lm	240 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80
PCS/CARTON	100 pcs	100 pcs
BEAM ANGLE	24°	24°
LED TYPE	COB	COB
SERIES	Spotic	Spotic
LIFETIME	30.000 h	30.000 h
DIMENSION		





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LP16-0100	3000K	5310341001570	LP16-0200	3000K	5310341001600
LP16-0110	4200K	5310341001587	LP16-0210	4200K	5310341001617
LP16-0120	6400K	5310341001594	LP16-0220	6400K	5310341001624

WATTS	3W	3W
EQ.WATTS	25W	25W
LUMINOUS FLUX	260 Lm	260 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80
PCS/CARTON	100 pcs	100 pcs
BEAM ANGLE	24°	24°
LED TYPE	COB	COB
SERIES	Spotis	Spotis
LIFETIME	30.000 h	30.000 h
DIMENSION		




COB LED DOWNLIGHT SERIES

In Luxmainer's drive to improve the lives of its customers, we have managed to create a line of products that not only strives to minimize energy use, but also human resources spent in maintenance. The Downlight series provides energy-efficiency, comfortable lighting and a utilitarian design that doesn't degrade performance.






MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LD17-0500	3000K	5310341001631	LD17-0800	3000K	5310341001662
LD17-0510	4200K	5310341001648	LD17-0810	4200K	5310341001679
LD17-0520	6400K	5310341001655	LD17-0820	6400K	5310341001686

WATTS	5W	8W
EQ.WATTS	40W	60W
LUMINOUS FLUX	550 Lm	880 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum
CRI	>80	>80
PCS/CARTON	50 pcs	50 pcs
BEAM ANGLE	60°	60°
LED TYPE	COB	COB
SERIES	COB PS	COB PS
LIFETIME	30.000 h	30.000 h
DIMENSION		




MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR	EAN CODE
LD18-0500	3000K	5310341001693	LD18-0800	3000K	5310341001723	LD25-0100	3000K	5310341003505
LD18-0510	4200K	5310341001709	LD18-0810	4200K	5310341001730	LD25-0110	4200K	5310341003512
LD18-0520	6400K	5310341001716	LD18-0820	6400K	5310341001747	LD25-0120	6400K	5310341003529



WATTS	5W	8W	7W
EQ.WATTS	40W	60W	35W
LUMINOUS FLUX	550 Lm	880 Lm	560 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60Hz
MATERIAL	Die Cast Aluminum	Die Cast Aluminum	/
CRI	>80	>80	>80
PCS/CARTON	50 pcs	50 pcs	50 pcs
BEAM ANGLE	60°	60°	/
LED TYPE	COB	COB	/
SERIES	COB PS	COB PS	EPISTAR
LIFETIME	30.000 h	30.000 h	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE
LD28-0100	3000K	5310341003536
LD28-0110	4200K	5310341003543
LD28-0120	6400K	5310341003550

MODEL	EAN CODE	MODEL	EAN CODE	MODEL	EAN CODE
LD29-0100	5310341003871	LD29-0110	5310341003888	LD29-0120	5310341003895
	3000K 6000K		3000K 6000K		3000K 6000K

WATTS	10W	15W	25W	35W
EQ.WATTS	50W	75W	125W	175W
LUMINOUS FLUX	800 Lm	1200 Lm	2000 Lm	2400 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	/	/	/	/
CRI	>80	>80	>80	>80
PCS/CARTON	50 pcs	24	24	12 pcs
PROPERTIES	/	/	/	/
SUITABLE FOR	/	/	/	/
SERIES	EPISTAR	EPISTAR	EPISTAR	EPISTAR
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION		φ130*h100mm	φ165*h115mm	φ200*h130mm



MODEL

EAN CODE

LD29-0200

5310341004663

3000K

6000K

MODEL

EAN CODE

LD29-0210

5310341004670

3000K

6000K

MODEL

EAN CODE

LD29-0220

5310341004687

3000K

6000K

WATTS

15W

25W

30W

EQ.WATTS

75W

125W

175W

LUMINOUS
FLUX

1200 Lm

2000 Lm

2400 Lm

VOLTAGE

220-240 V

220-240 V

220-240 V

FREQUENCY

50-60Hz

50-60Hz

50-60Hz

CAP-BASE

/

/

/

CRI

>80

>80

>80

PCS/CARTON

24 pcs

24 pcs

12 pcs

PROPERTIES

/

/

/

SUITABLE FOR

/

/

/

SERIES

EPISTAR

EPISTAR

EPISTAR

MATERIAL

ALUMINIUM

ALUMINIUM

ALUMINIUM

DIMENSION

φ130*h100mm

φ165*h115mm



φ200*h130mm

COB LED DOWNLIGHT SURFACE SERIES

In Luxmainer's drive to improve the lives of its customers, we have managed to create a line of products that not only strives to minimize energy use, but also human resources spent in maintenance. The Downlight series provides energy-efficiency, comfortable lighting and a utilitarian design that doesn't degrade performance.



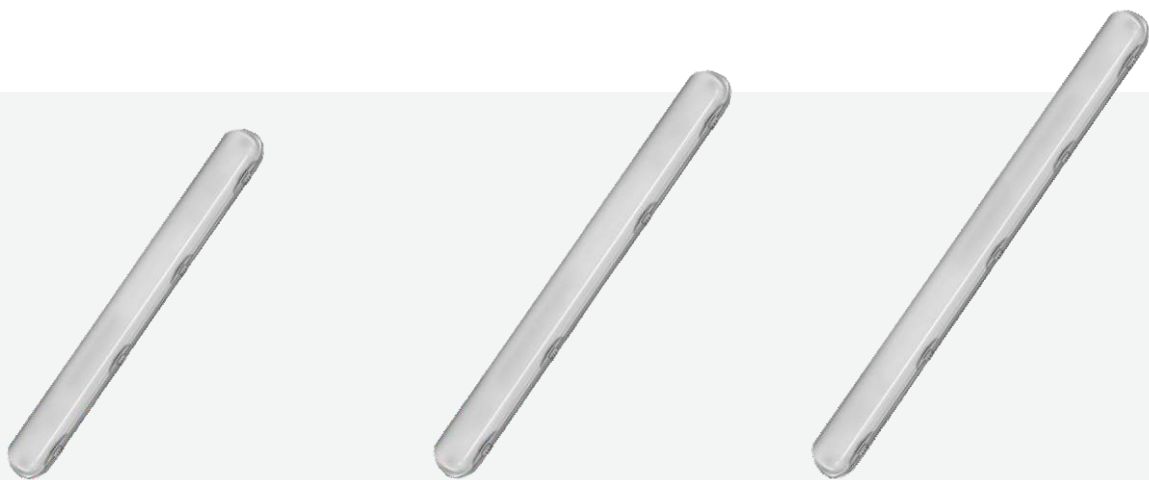
MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LD19-0500	3000K	5310341001754	LD19-0800	3000K	5310341001785
LD19-0510	4200K	5310341001761	LD19-0810	4200K	5310341001792
LD19-0520	6400K	5310341001778	LD19-0820	6400K	5310341001808

WATTS	5W	8W
EQ.WATTS	40W	60W
LUMINOUS FLUX	550 Lm	880 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
MATERIAL	Aluminium Diecast	Aluminium Diecast
CRI	>80	>80
PCS/CARTON	100 pcs	50 pcs
BEAM ANGLE	70°	70°
LED TYPE	COB	COB
SERIES	COB PS	COB PS
LIFETIME	30.000 h	30.000 h
DIMENSION		






WATERPROOF LED LIGHTING FIXTURES

The Luxmainer Outdoor Fixtures line of products aims to provide a design that is adaptable to all outdoor spaces. By allowing you to choose the perfect lighting option for your outdoor needs, the Outdoor Fixtures have the added benefit of lowering costs tremendously by utilizing what is the forefront of energy-efficient technology.





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LW01-0610	4000K	5310341001907	LW01-1210	4000K	5310341001921	LW01-1510	4000K	5310341001945
LW01-0620	6400K	5310341001914	LW01-1220	6400K	5310341001938	LW01-1520	6400K	5310341001952

WATTS	20W	40W	60W
EQ.WATTS	50W	100W	100W
LUMINOUS FLUX	1800 Lm	3200 Lm	5300 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP65	IP65	IP65
CRI	>80	>80	>80
PCS/CARTON	8 pcs	8 pcs	6 pcs
BEAM ANGLE	120°	120°	120°
BODY TYPE	Aluminium + Plastic	Aluminium + Plastic	Aluminium + Plastic
SERIES	Eco Proof	Eco Proof	Eco Proof
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LW19-1200	3000K	5310341001969	LW20-0605	3000K	5310341001990	LW20-1205	3000K	5310341002027
LW19-1210	4200K	5310341001976	LW20-0615	4200K	5310341002003	LW20-1215	4200K	5310341002034
LW19-1220	6400K	5310341001983	LW20-0625	6400K	5310341002010	LW20-1225	6400K	5310341002041

WATTS	36W	18W	36W
EQ.WATTS	150W	90W	150W
LUMINOUS FLUX	3200 Lm	1600 Lm	3200 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP44	IP44	IP44
CRI	>80	>80	>80
PCS/CARTON	6 pcs	20 pcs	20 pcs
BEAM ANGLE	120°	120°	120°
MATERIAL	DIE CAST ALUMINUM	DIE CAST ALUMINUM	DIE CAST ALUMINUM
SERIES	Project-PL	Plusline-P	Plusline-P
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			




LED WALL LAMP

Luxmainer's wall mounted LED lamp solutions present a platform that provides a dramatic increases in energy savings compared to traditional luminaries. The high quality of the white light that is emitted from the LED modules is unparalleled, and eases the lighting of both living and working areas.





MODEL	COLOR TEMP	EAN CODE
LW30-0400	3000K	5310341002058
LW30-0410	4200K	5310341002065
LW30-0420	6400K	5310341002072

WATTS	4W
EQ.WATTS	30W
LUMINOUS FLUX	390 Lm
VOLTAGE	220-240 V
FREQUENCY	50-60 Hz
IP RATING	IP44
CRI	>80
PCS/CARTON	30 pcs
BEAM ANGLE	140°
MATERIAL	DIE CAST ALUMINUM
SERIES	Slimline
LIFETIME	30.000 h
DIMENSION	





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LW30-0800	3000K	5310341002089	LW30-1200	3000K	5310341002119	LW30-1600	3000K	5310341002140
LW30-0810	4200K	5310341002096	LW30-1210	4200K	5310341002126	LW30-1610	4200K	5310341002157
LW30-0820	6400K	5310341002102	LW30-1220	6400K	5310341002133	LW30-1620	6400K	5310341002164

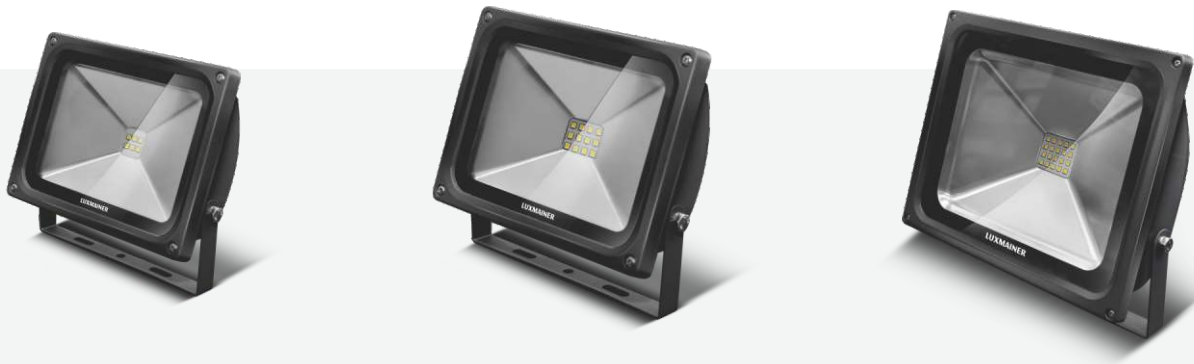
WATTS	8W	12W	16W
EQ.WATTS	50W	85W	120W
LUMINOUS FLUX	720 Lm	1100 Lm	1500 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP44	IP44	IP44
CRI	>80	>80	>80
PCS/CARTON	30 pcs	30 pcs	30 pcs
BEAM ANGLE	140°	140°	140°
MATERIAL	DIE CAST ALUMINUM	DIE CAST ALUMINUM	DIE CAST ALUMINUM
SERIES	Slimline	Slimline	Slimline
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			



LED FLOODLIGHT SERIES

The line of Floodlight products by Luxmainer is designed to increase the value of the time spent outdoors. It has been centred on the premise that outdoor areas require strong lights in order to stand out prominently, such as gardens, terraces, as well as recreation night-time areas which can benefit from the lighting not only in an architectural/aesthetic sense, but also in the functional one.





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LF01-1005	3000K	5310341002171	LF01-2005	3000K	5310341002195	LF01-3005	3000K	5310341002218
LF01-1025	6400K	5310341002188	LF01-2025	6400K	5310341002201	LF01-3025	6400K	5310341002225


WATTS	10W	20W	30W
EQ.WATTS	50W	100W	150W
LUMINOUS FLUX	850 Lm	1700 Lm	2650 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP65	IP65	IP65
CRI	>80	>80	>80
PCS/CARTON	20 pcs	12 pcs	8 pcs
BEAM ANGLE	120°	120°	120°
LED TYPE	SMD	SMD	SMD
SERIES	SMD Line	SMD Line	SMD Line
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			






LED FLOODLIGHT SERIES

The line of Floodlight products by Luxmainer is designed to increase the value of the time spent outdoors. It has been centred on the premise that outdoor areas require strong lights in order to stand out prominently, such as gardens, terraces, as well as recreation night-time areas which can benefit from the lighting not only in an architectural/aesthetic sense, but also in the functional one.







MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LF01-5005	3000K	5310341002232	LF03-1005	3000K	5310341002348	LF03-1505	3000K	5310341002362
LF01-5025	6400K	5310341002249	LF03-1025	6400K	5310341002355	LF03-1525	6400K	5310341002379

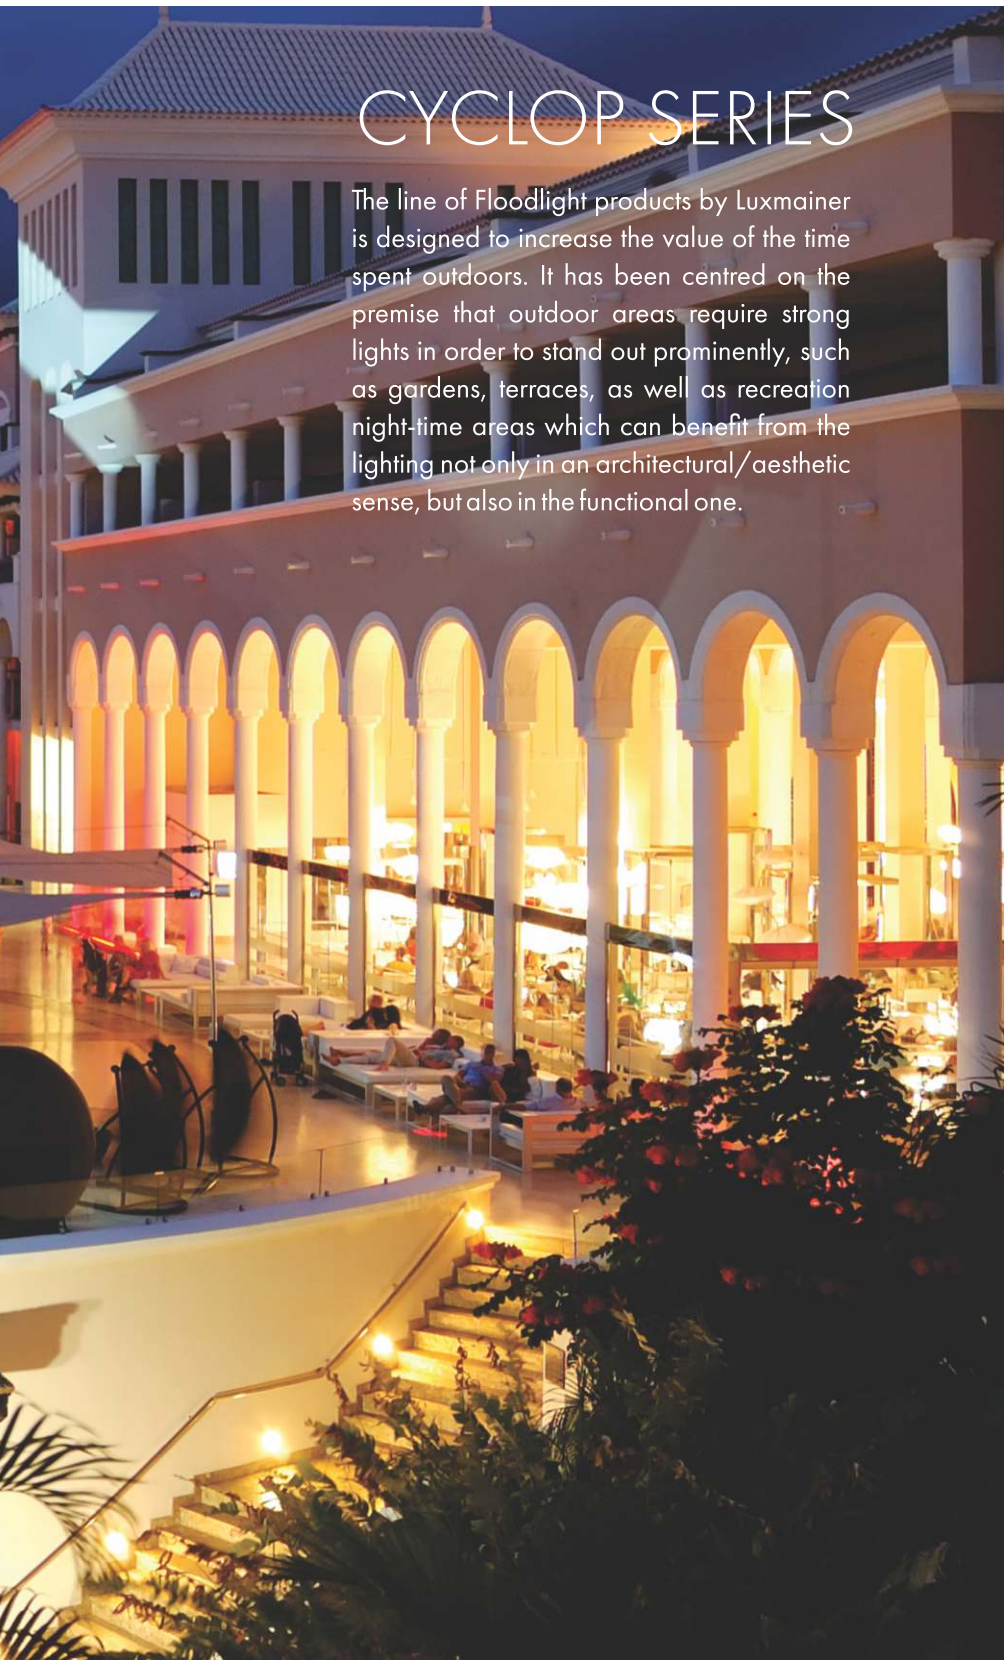
WATTS	50W	100W	150W
EQ.WATTS	250W	500W	800W
LUMINOUS FLUX	4250 Lm	8500 Lm	12750 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP65	IP65	IP65
CRI	>80	>80	>80
PCS/CARTON	6 pcs	2 pcs	2 pcs
BEAM ANGLE	120°	120°	120°
LED TYPE	SMD	SMD	SMD
SERIES	SMD Line	SMD Line	SMD Line
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LF02-1000	3000K	5310341002256	LF02-3000	3000K	5310341002287
LF02-1020	6400K	5310341002263	LF02-3020	6400K	5310341002294

WATTS	10W	30W
EQ.WATTS	50W	150W
LUMINOUS FLUX	850 Lm	2650 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
IP RATING	IP65	IP65
CRI	>80	>80
PCS/CARTON	30 pcs	16 pcs
BEAM ANGLE	120°	120°
BODY TYPE	Die Cast Aluminum	Die Cast Aluminum
SERIES	Cyclop Inova	Cyclop Inova
LIFETIME	30.000 h	30.000 h
DIMENSION		






CYCLOP SERIES

The line of Floodlight products by Luxmainer is designed to increase the value of the time spent outdoors. It has been centred on the premise that outdoor areas require strong lights in order to stand out prominently, such as gardens, terraces, as well as recreation night-time areas which can benefit from the lighting not only in an architectural/aesthetic sense, but also in the functional one.



MODEL	COLOR TEMP	EAN CODE
LF02-5000	3000K	5310341002317
LF02-5020	6400K	5310341002324

WATTS	50W
EQ.WATTS	250W
LUMINOUS FLUX	4250 Lm
VOLTAGE	220-240 V
FREQUENCY	50-60 Hz
IP RATING	IP65
CRI	>80
PCS/CARTON	10 pcs
BEAM ANGLE	120°
BODY TYPE	Die Cast Aluminum
SERIES	Cyclop Inova
LIFETIME	30.000 h
DIMENSION	

CYCLOP WITH SENSOR SERIES

The line of Floodlight products by Luxmainer is designed to increase the value of the time spent outdoors. It has been centred on the premise that outdoor areas require strong lights in order to stand out prominently, such as gardens, terraces, as well as recreation night-time areas which can benefit from the lighting not only in an architectural/aesthetic sense, but also in the functional one.








with sensor 



with sensor 



with sensor 

MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LF02-1021	6400K	5310341002270	LF02-3021	6400K	5310341002300	LF02-5021	6400K	5310341002331
WATTS	10W		30W		50W			
EQ.WATTS	50W		150W		250W			
LUMINOUS FLUX	850 Lm		2650 Lm		4250 Lm			
VOLTAGE	220-240 V		220-240 V		220-240 V			
FREQUENCY	50-60 Hz		50-60 Hz		50-60 Hz			
IP RATING	IP65		IP65		IP65			
CRI	>80		>80		>80			
PCS/CARTON	20 pcs		10 pcs		6 pcs			
BEAM ANGLE	120°		120°		120°			
BODY TYPE	Die Cast Aluminum		Die Cast Aluminum		Die Cast Aluminum			
SERIES	Cyclop Inova		Cyclop Inova		Cyclop Inova			
LIFETIME	30.000 h		30.000 h		30.000 h			
DIMENSION								

MINIMAL SERIES

The Luxmainer Minimmall products seek to provide the best possible detail lighting for indoor spaces. Allow your staircases, metal fixtures, and other decorative elements to shine out, as the Minimmall series of products breathes a new life into them. The functional gains of highlighting these elements are offset by the tremendous impact they can have on creating a pleasant lighting atmosphere.



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD26-0100	3000K	5310341003901	LD40-0100	3000K	5310341004069
LD26-0120	6400K	5310341003918			

WATTS	1W	3W
EQ.WATTS	5W	15W
LUMINOUS FLUX	8 Lm	24 Lm
VOLTAGE	28-265 V	28-265 V
FREQUENCY	50-60Hz	50-60Hz
IP RATING	IP20	IP20
CRI	>80	>80
PCS/CARTON	100 pcs	50 pcs
BEAM ANGLE	/	/
COLOR	/	/
SERIES	MINIMALL	MINIMALL
MATERIAL	ALUMINIUM	ALUMINIUM



MODEL	COLOR	EAN CODE
LD33-0100	3000K	5310341003925
LD33-0120	6400K	5310341003932

MODEL	COLOR	EAN CODE
LD34-0100	3000K	5310341003949
LD34-0120	6400K	5310341003956

MODEL	COLOR	EAN CODE
LD30-0100	3000K	5310341003963
LD30-0120	6400K	5310341003970

WATTS	1W	1W	1W
EQ.WATTS	5W	5W	5W
LUMINOUS FLUX	8 Lm	8 Lm	8 Lm
VOLTAGE	28-265 V	28-265 V	28-265 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	IP20	IP20	IP20
CRI	>80	>80	>80
PCS/CARTON	100 pcs	100 pcs	100 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	MINIMALL	MINIMALL	MINIMALL
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			




MODEL	COLOR	EAN CODE
LD31-0100	3000K	5310341003987
LD31-0120	6400K	5310341003994

MODEL	COLOR	EAN CODE
LD32-0100	3000K	5310341004007
LD32-0120	6400K	5310341004014

MODEL	COLOR	EAN CODE
LD38-0120	6400K	5310341004021

WATTS	1W	1W	3W
EQ.WATTS	5W	5W	15W
LUMINOUS FLUX	8 Lm	8 Lm	24 Lm
VOLTAGE	28-265 V	28-265 V	28-265 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	IP20	IP20	IP20
CRI	>80	>80	>80
PCS/CARTON	100 pcs	100 pcs	50 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	MINIMALL	MINIMALL	MINIMALL
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL COLOR EAN CODE

MODEL COLOR EAN CODE

MODEL COLOR EAN CODE

LD37-0120 6400K 5310341004038

LD36-0100 3000K 5310341004045

LD39-0100 3000K 5310341004052

WATTS	3W	1W	1W
EQ.WATTS	15W	5W	5W
LUMINOUS FLUX	24 Lm	8 Lm	8 Lm
VOLTAGE	28-265 V	28-265 V	28-265 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	IP20	IP20	IP20
CRI	>80	>80	>80
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	/	/	/
SUITABLE FOR	/	/	/
SERIES	MINIMALL	MINIMALL	MINIMALL
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			




LED PANELLIGHT SERIES


The Luxmainer LED Panel line of products provides a perfect fit for both new buildings, and spaces that are being renovated. It provides a substantial increase in the quality of light, while more than halving maintenance and upkeep costs. As a singular surface of light, it provides incredible lumination, and its homogeneous brightness washes over surfaces while looking ultra modern. With various capabilities, from remote control to dimming, the LED Panels have something for every situation.







MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LB01-3100	3000K	5310341002386	LB01-6600	3000K	5310341002416	LB01-3600	3000K	5310341005301
LB01-3110	4200K	5310341002393	LB01-6610	4200K	5310341002423	LB01-3610	4200K	5310341005318
LB01-3120	6400K	5310341002409	LB01-6620	6400K	5310341002430	LB01-3620	6400K	5310341005325

WATTS	45W	45W	36W
EQ.WATTS	250W	250W	175W
LUMINOUS FLUX	3200 Lm	3200 Lm	2800Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP44	IP44	IP44
CRI	>80	>80	>80
PCS/CARTON	5 pcs	10 pcs	10 pcs
BEAM ANGLE	120°	120°	120°
BODY TYPE	PMMA + DIE CAST	PMMA + DIE CAST	PMMA + DIE CAST
MOUNT. TYPE	Recessed	Recessed	Recessed
LIFETIME	30.000 h	30.000 h	30.000 h
DIMENSION			





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LB03-6600	3000K	5310341002478	LB03-3100	3000K	5310341002508
LB03-6610	4200K	5310341002485	LB03-3110	4200K	5310341002515
LB03-6620	6400K	5310341002492	LB03-3120	6400K	5310341002522

WATTS	50W	50W
EQ.WATTS	150W	150W
LUMINOUS FLUX	4000 Lm	4000 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
IP RATING	IP44	IP44
CRI	>80	>80
PCS/CARTON	1	1
BEAM ANGLE	140°	140°
BODY TYPE	PMMA + DIE CAST	PMMA + DIE CAST
MOUNT. TYPE	Surface	Surface
LIFETIME	30.000 h	30.000 h
DIMENSION		

SPOTLIGHT FIXTURES

Luxmainer's Spotlight Fixtures present a system which aims to provide aesthetics and light up the most important areas of a home. By providing energy-savings which are as of now unreachable by any other technology and a quality of light which is unrivalled.






MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD22-0100	WHITE CRYSTAL	5310341002539	LD22-0110	WHITE BLACK	5310341002546
VOLTAGE	220-240 V		220-240 V		
FREQUENCY	50-60 Hz		50-60 Hz		
IP	IP20		IP20		
PCS/CARTON	30 pcs		30 pcs		
SERIES	Platinum		Platinum		
DIMENSION					




LUXMAINER






MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD22-0120	CHROME GOLD	5310341002553	LD23-0100	WHITE CRYSTAL	5310341002560	LD23-0110	ALCHROME CRYSTAL	5310341002577

VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP	IP20	IP20	IP20
PCS/CARTON	30 pcs	30 pcs	30 pcs
SERIES	Platinum	Avantgarde	Avantgarde
DIMENSION			



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD23-0120	WHITE CHRYSTAL	5310341002584	LD24-0100	ALCHROME	5310341002591	LD24-0110	ALCHROME	5310341002607

VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP	IP20	IP20	IP20
PCS/CARTON	30 pcs	30 pcs	30 pcs
SERIES	Luxury	Aroxe	Aroxe
DIMENSION			



MODEL	COLOR	EAN CODE
LD53-0100	WHITE	5310341003734

WATTS	/
EQ.WATTS	/
LUMINOUS FLUX	/
VOLTAGE	/
FREQUENCY	/
CAP-BASE	/
CRI	/
PCS/CARTON	80 pcs
PROPERTIES	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10
SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM
DIMENSION	CUTOUT: 90mm

SPOTLIGHT FIXTURES

UNICASE
SERIES

Luxmainer's Spotlight Fixtures present a system which aims to provide aesthetics and light up the most important areas of a home. By providing energy-savings which are as of now unreachable by any other technology and a quality of light which is unrivalled.



MODEL	COLOR	EAN CODE
LD50-0100	WHITE	5310341003703



MODEL	COLOR	EAN CODE
LD51-0100	WHITE	5310341003710



MODEL	COLOR	EAN CODE
LD52-0100	WHITE	5310341003727




WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	80 pcs	100 pcs	80 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION	CUTOUT: 100mm	CUTOUT: 80mm	CUTOUT: 80mm



MODEL	COLOR	EAN CODE
LD46-0110	WHITE	5310341003642

MODEL	COLOR	EAN CODE
LD46-0120	BLACK	5310341003659

MODEL	COLOR	EAN CODE
LD47-0210	WHITE	5310341003666

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
BEAM ANGLE	/	/	/
SUITABLE FOR	/	/	/
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			






MODEL	COLOR	EAN CODE
LD47-0220	BLACK	5310341003673



MODEL	COLOR	EAN CODE
LD48-0310	WHITE	5310341003680



MODEL	COLOR	EAN CODE
LD48-0320	BLACK	5310341003697

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
BEAM ANGLE	/	/	/
SUITABLE FOR	/	/	/
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

LUXMAINER






MODEL	COLOR	EAN CODE
LD54-0100	WHITE	5310341003741



MODEL	COLOR	EAN CODE
LD54-0200	BLACK	5310341003758



MODEL	COLOR	EAN CODE
LD54-0300	WHITE	5310341003765




WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	64 pcs	27 pcs	18 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION	 CUTOUT: 90x90	 CUTOUT: 90x165	 CUTOUT: 90x230



MODEL	COLOR	EAN CODE
LD56-0110	WHITE	5310341003802

MODEL	COLOR	EAN CODE
LD56-0120	BLACK	5310341003819

MODEL	COLOR	EAN CODE
LD56-0130	GOLD	5310341003826

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	48 pcs	48 pcs	48 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			






MODEL	COLOR	EAN CODE
LD41-0850	WHITE & BLACK	5310341003567



MODEL	COLOR	EAN CODE
LD41-0105	WHITE	5310341003574




MODEL	COLOR	EAN CODE
LD42-0110	WHITE & BLACK	5310341003581

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE
LD45-0100	WHITE	5310341003611



MODEL	COLOR	EAN CODE
LD45-0110	SILVER	5310341003628



MODEL	COLOR	EAN CODE
LD45-0120	BLACK	5310341003635

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

LUXMAINER






MODEL	COLOR	EAN CODE
LD42-0200	WHITE	5310341005660



MODEL	COLOR	EAN CODE
LD45-0205	WHITE & DARK GREY	5310341005646



MODEL	COLOR	EAN CODE
LD45-0210	SILVER	5310341005622

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL
LD45-0215

COLOR
SILVER & BLACK

EAN CODE
5310341005639

MODEL
LD45-0220




COLOR
BLACK

EAN CODE
5310341005615

MODEL
LD45-0130

COLOR
DARK GREY

EAN CODE
5310341005684

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

LUXMAINER






MODEL	COLOR	EAN CODE
LD49-0100	WHITE	5310341005707



MODEL	COLOR	EAN CODE
LD49-0110	BLACK	5310341005714





MODEL	COLOR	EAN CODE
LD49-0120	GREY	5310341005721

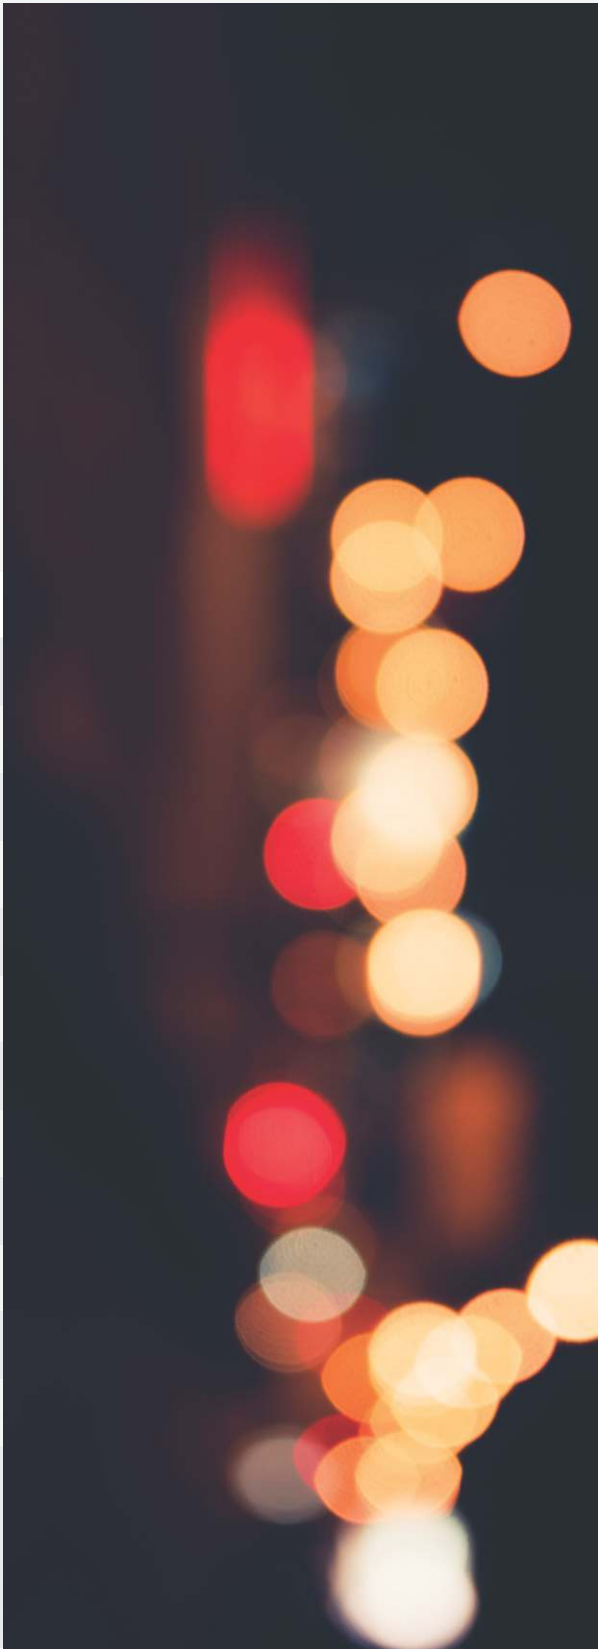
WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE
LD49-0200	WHITE	5310341005691

MODEL	COLOR	EAN CODE
LD42-0215	DARK GREY	5310341005653

WATTS	/	/
EQ.WATTS	/	/
LUMINOUS FLUX	/	/
VOLTAGE	/	/
FREQUENCY	/	/
CAP-BASE	/	/
CRI	/	/
PCS/CARTON	50 pcs	50 pcs
PROPERTIES	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10
SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM
DIMENSION		








MODEL	COLOR	EAN CODE
LD42-0220	BLACK & DARK GREY	5310341003628



MODEL	COLOR	EAN CODE
LD43-0950	WHITE & BLACK	5310341003598



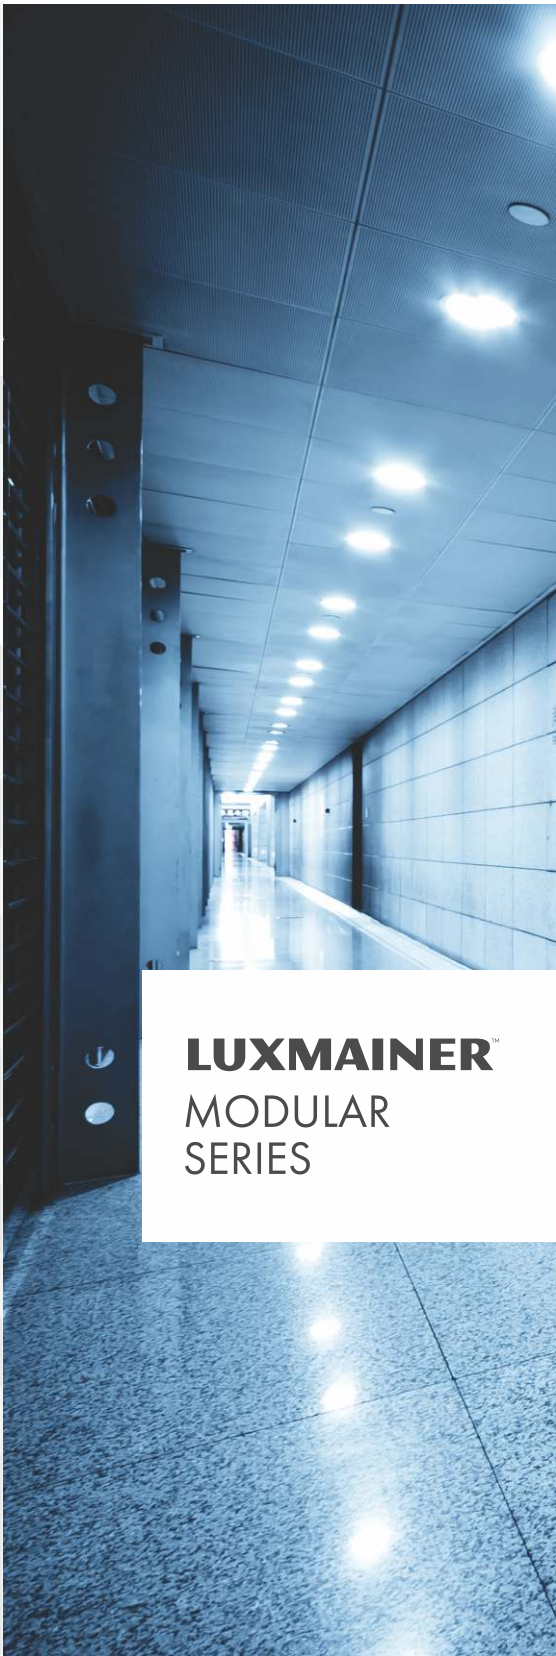
MODEL	COLOR	EAN CODE
LD44-0950	WHITE	5310341003604

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	50 pcs	50 pcs	50 pcs
PROPERTIES	MODULAR FIXTURE	FIXTURE WITHOUT BULB	FIXTURE WITHOUT BULB
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	MODULAR SERIES	UNICASE SERIES	UNICASE SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			

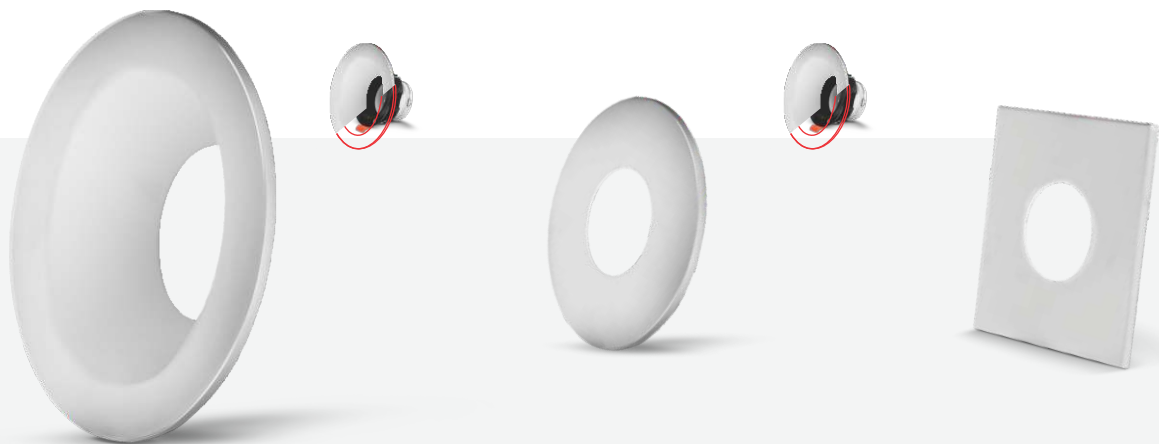


MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD42-0200	WHITE & BLACK	5310341005738	LD42-0300	WHITE & BLACK	5310341005806

WATTS	/	/
EQ.WATTS	/	/
LUMINOUS FLUX	/	/
VOLTAGE	/	/
FREQUENCY	/	/
CAP-BASE	/	/
CRI	/	/
PCS/CARTON	50 pcs	50 pcs
PROPERTIES	MODULAR FIXTURE	MODULAR FIXTURE
SUITABLE FOR	MR16/GU10	MR16/GU10
SERIES	MODULAR SERIES	MODULAR SERIES
MATERIAL	ALUMINIUM	ALUMINIUM
DIMENSION	Φ 85mm * H45mm cutout: 75mm	Φ 105mm * H50mm cutout: 95mm

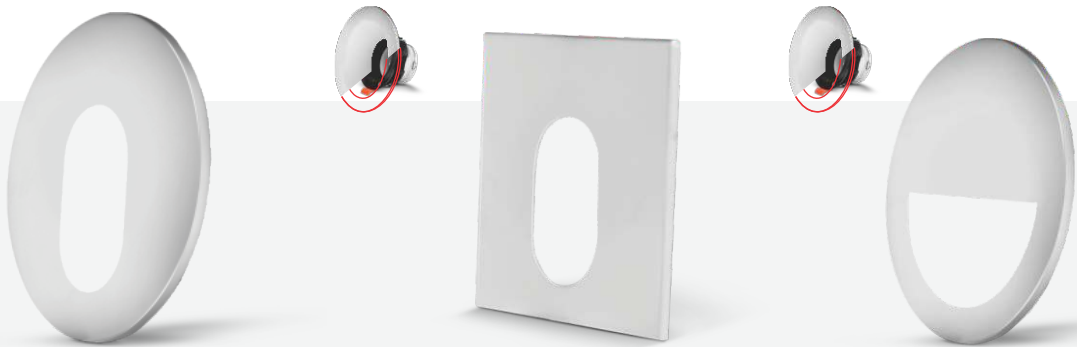


LUXMAINER™
MODULAR
SERIES



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD42-0206	WHITE/BLACK	5310341005790	LD42-0201	WHITE/BLACK	5310341005745	LD42-0202	WHITE/BLACK	5310341005752

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
PCS/BOX	9 pcs	9 pcs	9 pcs
PCS/CARTON	135 pcs	135 pcs	135 pcs
PROPERTIES	MODULAR FIXTURE	MODULAR FIXTURE	MODULAR FIXTURE
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	MODULAR SERIES	MODULAR SERIES	MODULAR SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD42-0203	WHITE & BLACK	5310341005769	LD42-0204	WHITE & BLACK	5310341005776	LD42-0205	WHITE/BLACK	5310341005783

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
PCS/BOX	9 pcs	9 pcs	9 pcs
PCS/CARTON	135 pcs	135 pcs	135 pcs
PROPERTIES	MODULAR FIXTURE	MODULAR FIXTURE	MODULAR FIXTURE
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	MODULAR SERIES	MODULAR SERIES	MODULAR SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD42-0306	WHITE/BLACK	5310341005868	LD42-0301	WHITE/BLACK	5310341005813	LD42-0302	WHITE/BLACK	5310341005820

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
PCS/BOX	9 pcs	9 pcs	9 pcs
PCS/CARTON	135 pcs	135 pcs	135 pcs
PROPERTIES	MODULAR FIXTURE	MODULAR FIXTURE	MODULAR FIXTURE
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	MODULAR SERIES	MODULAR SERIES	MODULAR SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD42-0303	WHITE & BLACK	5310341005837	LD42-0304	WHITE & BLACK	5310341005844	LD42-0305	WHITE/BLACK	5310341005851

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
PCS/BOX	9 pcs	9 pcs	9 pcs
PCS/CARTON	135 pcs	135 pcs	135 pcs
PROPERTIES	MODULAR FIXTURE	MODULAR FIXTURE	MODULAR FIXTURE
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	MODULAR SERIES	MODULAR SERIES	MODULAR SERIES
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



LED TRACKLIGHT

Luxmainer's Track Lighting product range shows up an unparalleled flexible solution which can be adapted to the different environments in which it is installed. It provides energy-savings on a new level, and if the product range is used as a comprehensive solution for all lighting needs, the energy footprint of the building will drop off.





MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD55-0110	BLACK	5310341003772	LD55-0120	WHITE	5310341003789	LD55-0130	GOLD	5310341003796

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	45 pcs	45 pcs	45 pcs
PROPERTIES	/	/	/
SUITABLE FOR	MR16/GU10	/	/
SERIES	INFISSI SHOPLINE	INFISSI SHOPLINE	INFISSI SHOPLINE
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR	EAN CODE
LD57-0110	WHITE	5310341003833

MODEL	COLOR	EAN CODE
LD57-0120	BLACK	5310341003840

MODEL	COLOR	EAN CODE
LD57-0130	GOLD	5310341003857

WATTS	/	/	/
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	/	/	/
FREQUENCY	/	/	/
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	48 pcs	48 pcs	48 pcs
PROPERTIES	/	/	/
SUITABLE FOR	MR16/GU10	MR16/GU10	MR16/GU10
SERIES	INFISSI SHOPLINE	INFISSI SHOPLINE	INFISSI SHOPLINE
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			






MODEL	COLOR TEMP.	EAN CODE
LT35-0700	5000K	5310341004465



MODEL	COLOR TEMP.	EAN CODE
LT35-0800	5000K	5310341004472




MODEL	COLOR TEMP.	EAN CODE
LT35-0900	5000K	5310341004489

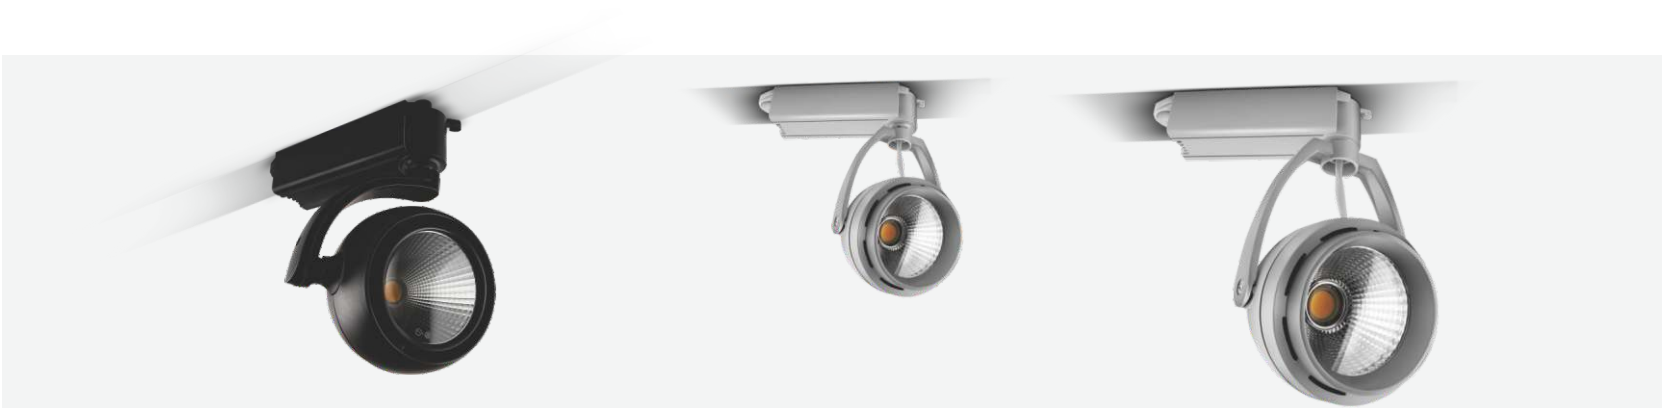
WATTS	10W	20W	30W
EQ.WATTS	50W	100W	150W
LUMINOUS FLUX	800 Lm	1600 Lm	2400 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	20 pcs	8 pcs	8 pcs
PROPERTIES	LED TRACK LIGHT	LED TRACK LIGHT	LED TRACK LIGHT
SUITABLE FOR	/	/	/
SERIES	INFISSI SHOPLINE	INFISSI SHOPLINE	INFISSI SHOPLINE
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LT35-0100	3000K	5310341002638	LT35-0200	3000K	5310341002652	LT35-0300	3000K	5310341002676
LT35-0120	5000K	5310341002645	LT35-0220	5000K	5310341002669	LT35-0320	5000K	5310341002683




WATTS	32W	32W	30W
EQ.WATTS	200W	200W	165W
LUMINOUS FLUX	2900 Lm	2900 Lm	2100 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP44	IP44	IP44
CRI	>80	>80	>80
PCS/CARTON	10 pcs	10 pcs	8 pcs
BEAM ANGLE	25°	25°	25°
LED TYPE	COB	COB	COB
LIFETIME	30.000 h	30.000 h	30.000 h

DIMENSION			
-----------	---	---	---



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LT35-0400	3000K	5310341002690	LT35-0500	3000K	5310341002713	LT35-0600	3000K	5310341002737
LT35-0420	5000K	5310341002706	LT35-0520	5000K	5310341002720	LT35-0620	6400K	5310341002744

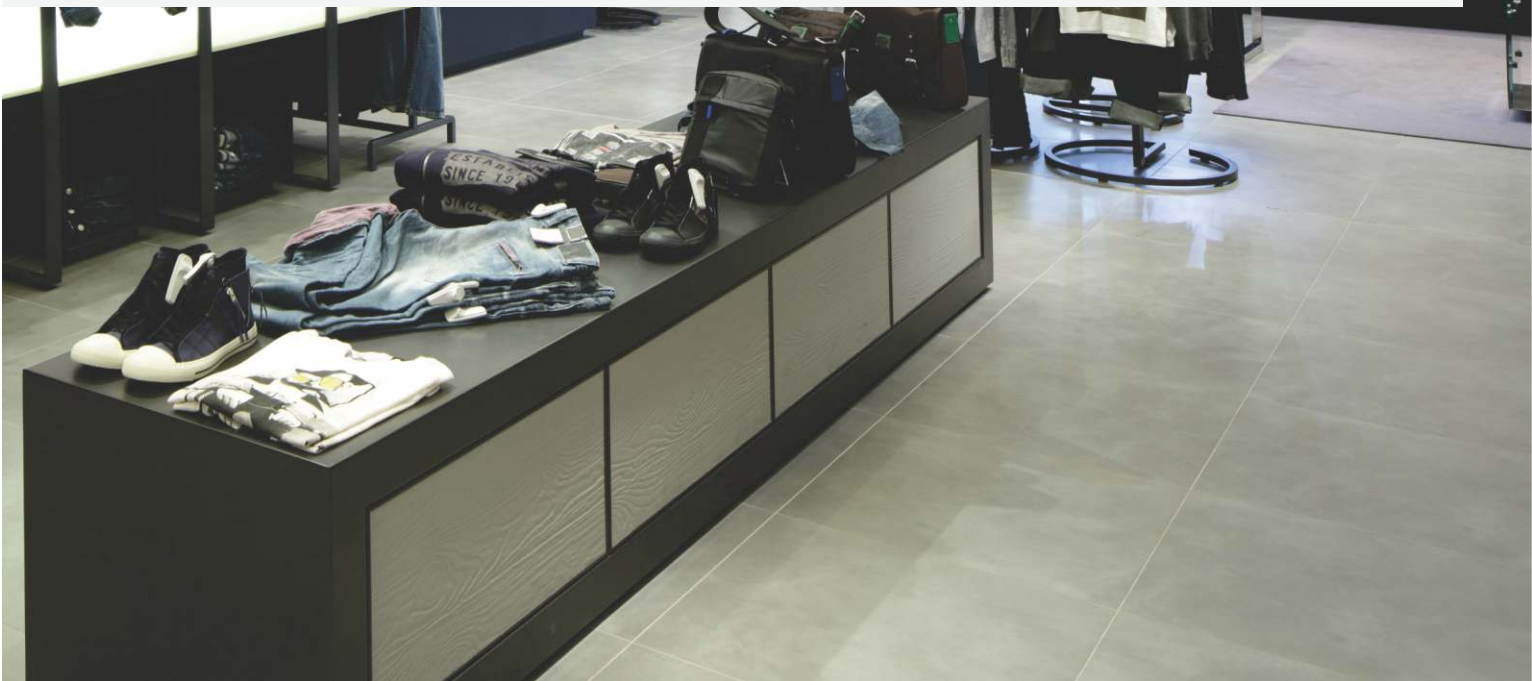
WATTS	20W	10W	20W
EQ.WATTS	100W	60W	60W
LUMINOUS FLUX	1600 Lm	900 Lm	1600 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP44	IP44	IP44
CRI	>80	>80	>80
PCS/CARTON	10 pcs	20 pcs	8 pcs
BEAM ANGLE	25°	25°	25°
LED TYPE	COB	COB	COB
LIFETIME	30.000 h	30.000 h	30.000 h

DIMENSION			
-----------	---	---	---



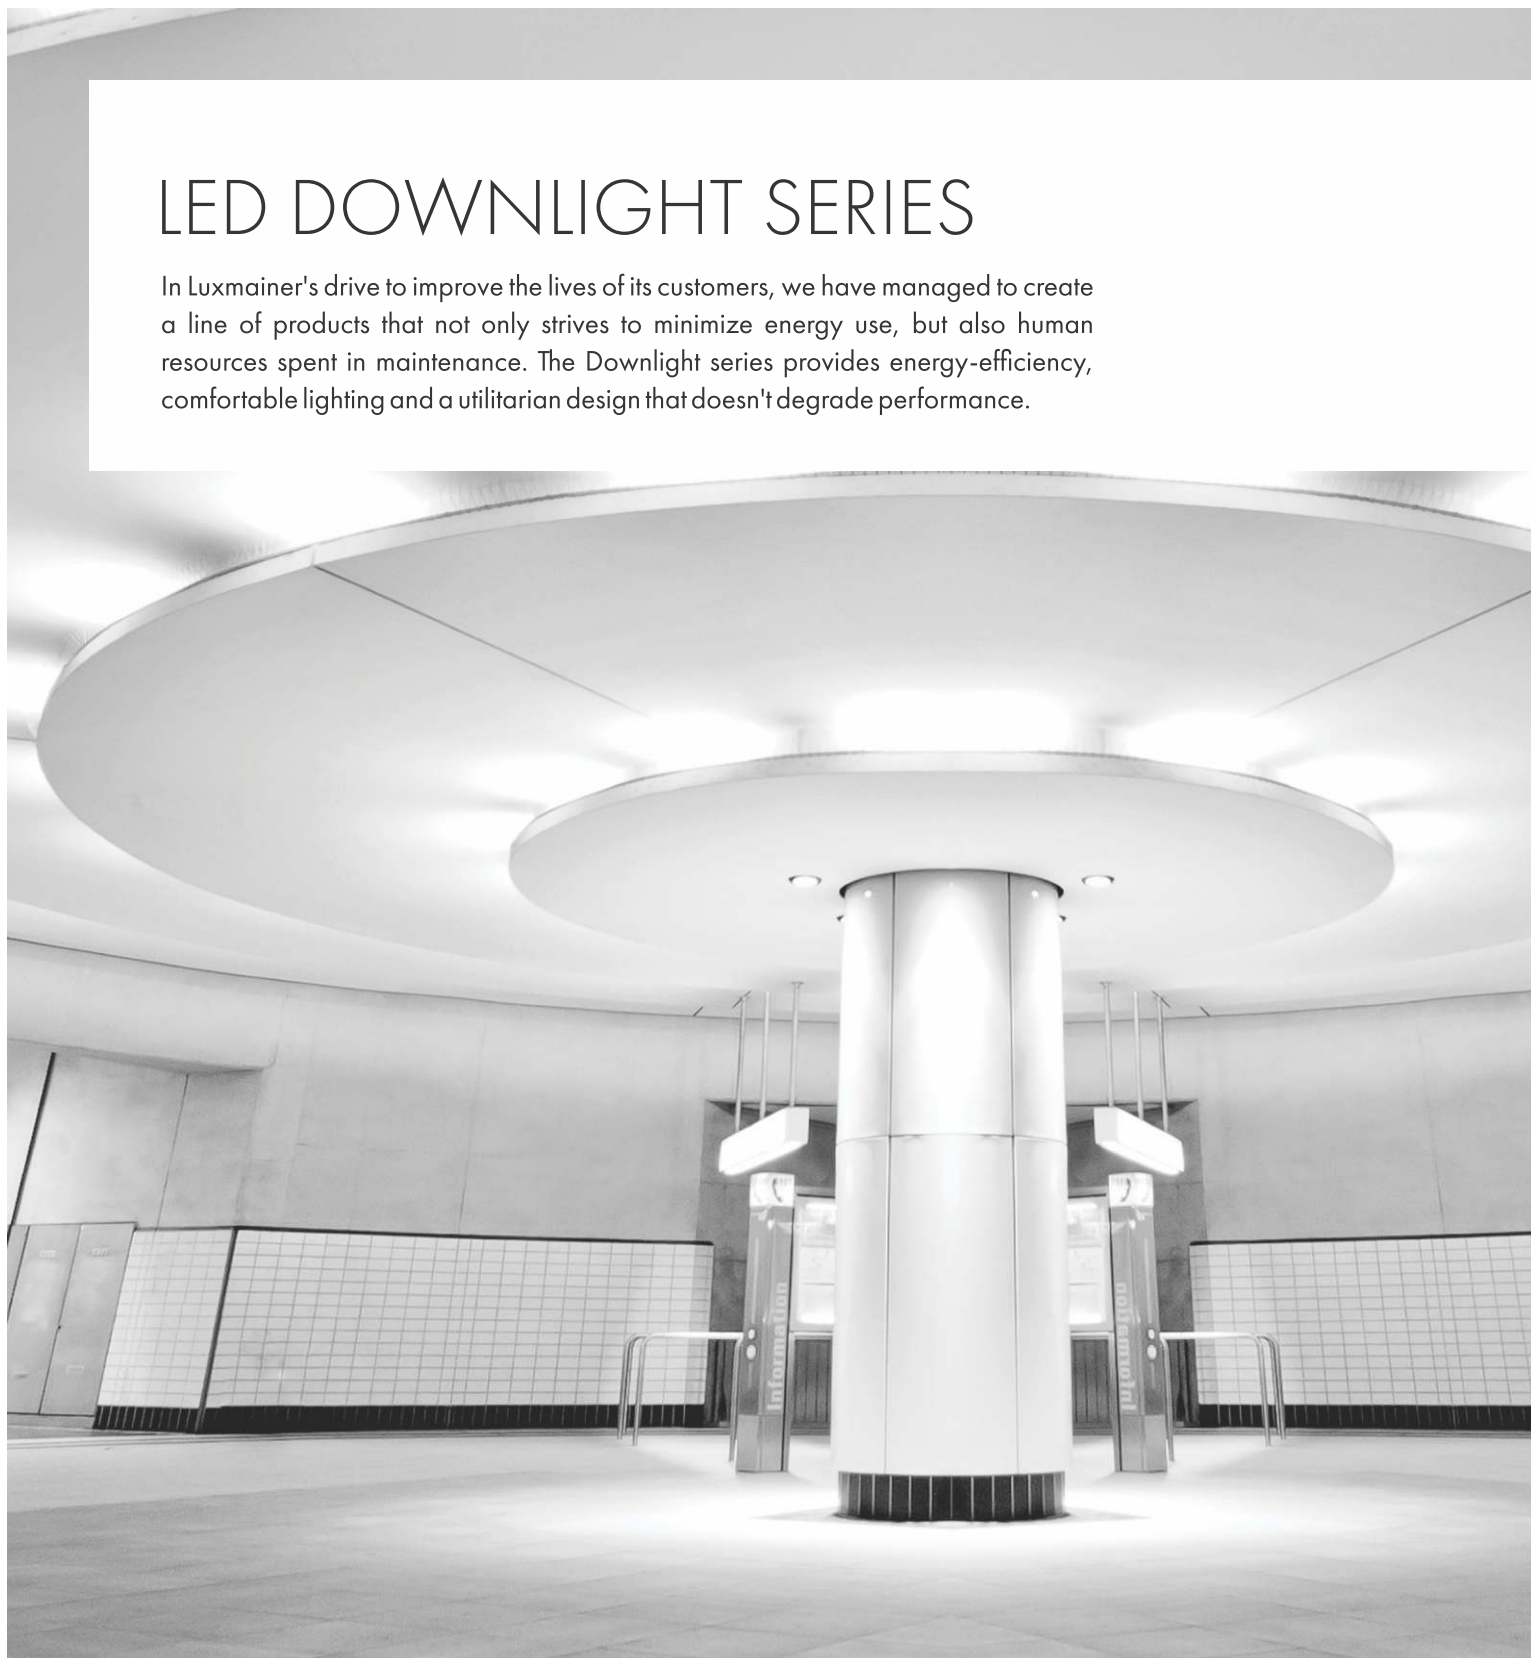
SHOPLINE

Luxmainer's Track Lighting product range shows up an unparalleled flexible solution which can be adapted to the different environments in which it is installed. It provides energy-savings on a new level, and if the product range is used as a comprehensive solution for all lighting needs, the energy footprint of the building will drop off.



LED DOWNLIGHT SERIES

In Luxmainer's drive to improve the lives of its customers, we have managed to create a line of products that not only strives to minimize energy use, but also human resources spent in maintenance. The Downlight series provides energy-efficiency, comfortable lighting and a utilitarian design that doesn't degrade performance.





MODEL	COLOR TREMP	EAN CODE	MODEL	COLOR TREMP	EAN CODE
LT36-0100	3000K	5310341002751	LT36-0200	3000K	5310341002782
LT36-0110	4200K	5310341002768	LT36-0210	4200K	5310341002799
LT36-0120	6400K	5310341002775	LT36-0220	6400K	5310341002805

WATTS	10W	30W
EQ.WATTS	60W	150W
LUMINOUS FLUX	900 Lm	2900 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
IP RATING	IP44	IP44
CRI	>80	>80
PCS/CARTON	50 pcs	12 pcs
BEAM ANGLE	38°	38°
LED TYPE	COB	COB
LIFETIME	30.000 h	30.000 h

DIMENSION





MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LL46-0400	3000K	5310341003031	LL45-0400	3000K	5310341002973
LL46-0402	6400K	5310341003048	LL45-0402	6400K	5310341002980
LL46-0407	RGB	5310341003055	LL45-0403	RED	5310341002997
LL46-0404	GREEN	5310341003079	LL45-0404	GREEN	5310341003000
LL46-0405	BLUE	5310341003086	LL45-0405	BLUE	5310341003017
LL46-0403	RED	5310341003062	LL45-0407	RGB	5310341003024

LED STRIPS

WATTS	14.4 W	14.4 W
LUMINOUS FLUX	12Lm / LED	12Lm / LED
VOLTAGE	220 V	12 V
FREQUENCY	50-60 Hz	50-60 Hz
CRI	>80	>80
IP RATING	IP54	IP54
LED TYPE	5050	5050
LED QTY/M	60	60
BEAM ANGLE	120°	120°
PCS/CARTON	100m	200m
QUANTITY	100m/roll	5m/roll

The Luxmainer LED Strip line of products brings together versatility, and high energy efficiency in order to provide a modular solution that can fit a variety of use cases. The high quality of the white light that is emitted from the LED modules is unparalleled.



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LL45-0300	3000K	5310341002935	LL45-0200	3000K	5310341002874	LL45-0100	3000K	5310341002812
LL45-0302	6400K	5310341002942	LL45-0202	6400K	5310341002881	LL45-0102	6400K	5310341002829
LL45-0305	BLUE	5310341002959	LL45-0203	RED	5310341002898	LL45-0103	RED	5310341002836
LL45-0307	RGB	5310341002966	LL45-0204	GREEN	5310341002904	LL45-0104	GREEN	5310341002843
			LL45-0205	BLUE	5310341002911	LL45-0105	BLUE	5310341002850
			LL45-0206	YELLOW	5310341002928	LL45-0106	YELLOW	5310341002867

WATTS	14,4 W	4,8 W	4,8 W
LUMINOUS FLUX	12Lm / LED	7Lm / LED	7Lm / LED
VOLTAGE	12 V	12 V	12 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CRI	>80	>80	>80
IP	IP20	IP54	IP20
LED TYPE	5050	2835	2835
LED QTY/M	60	60	60
BEAM ANGLE	120°	120°	120°
PCS/CARTON	200m	200m	200m
QUANTITY	5M/roll	5M/roll	5M/roll

OUTDOOR SERIES

The Luxmainer Outdoor Fixtures line of products aims to provide a design that is adaptable to all outdoor spaces. By allowing you to choose the perfect lighting option for your outdoor needs, the Outdoor Fixtures have the added benefit of lowering costs tremendously by utilizing what is the forefront of energy-efficient technology.





MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LR02-0110	3000K	5310341003116	LR02-0500	3000K	5310341005479
LR02-0120	6400K	5310341003123			

WATTS	36x0.2W	36x0.2W
EQ.WATTS	60W	60W
LUMINOUS FLUX	425 Lm	242 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
IP RATING	IP65	IP65
CRI	>80	>80
PCS/CARTON	24 pcs	24 pcs
BEAM ANGLE	25°	25°
COLOR	GREY	WHITE
SERIES	Aventa	Aventa
LIFETIME	30.000 h	30.000 h

--	--



MODEL	COLOR	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LR01-0110	3000K	5310341003093	LR03-0110	3000K	5310341003130	LR04-0110	3000K	5310341003154
LR01-0120	6400K	5310341003109	LR03-0120	6400K	5310341003147	LR04-0120	6400K	5310341003161

WATTS	4x1W	2x2W	2x6W
EQ.WATTS	32W	32W	100W
LUMINOUS FLUX	350 Lm	180 Lm	633 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP65	IP65	IP65
CRI	>80	>80	>80
PCS/CARTON	18 pcs	20 pcs	20 pcs
BEAM ANGLE	25°	25°	25°
COLOR	GREY	GREY	GREY
SERIES	Eledor	Luna	Lorex
LIFETIME	30.000 h	30.000 h	30.000 h
			




MODEL	COLOR TEMP	EAN CODE
LR05-0110	3000K	5310341003178
LR05-0120	6400K	5310341003185

MODEL	COLOR	EAN CODE
LR08-0100	3000K	5310341004298
LR08-0120	6400K	5310341004304

MODEL	COLOR	EAN CODE
LR08-0200	3000K	5310341004311
LR08-0220	6400K	5310341004328



WATTS	4x1W	1x3W	2x3W
EQ.WATTS	32W	24W	48W
LUMINOUS FLUX	280 Lm	85 Lm	160 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60Hz	50-60Hz
IP RATING	IP65	IP54	IP54
CRI	>80	>80	>80
PCS/CARTON	12 pcs	24 pcs	20 pcs
BEAM ANGLE	45°	/	/
COLOR	GREY	GREY	GREY
SERIES	Ledex	CRELEX	CRELEX
LIFETIME	30.000 h	ALUMINIUM	ALUMINIUM





MODEL	COLOR TREMP	EAN CODE	MODEL	COLOR TREMP	EAN CODE	MODEL	COLOR	EAN CODE
LR06-0110	3000K	5310341003192	LR06-0210	3000K	5310341003215	LR06-0500	3000K	5310341004410
LR06-0120	6400K	5310341003208	LR06-0220	6400K	5310341003222			

WATTS	1x3W	2x3W	1x3W
EQ.WATTS	24W	48W	24W
LUMINOUS FLUX	100 Lm	200 Lm	160 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60Hz
CAP-BASE	IP65	IP65	IP54
CRI	>80	>80	>80
PCS/CARTON	20 pcs	18 pcs	20 pcs
PROPERTIES	35°	35°	/
SUITABLE FOR	GREY	GREY	WHITE
SERIES	Crelex	Crelex	CRELEX
MATERIAL	30.000 h	30.000 h	ALUMINIUM
DIMENSION			





MODEL	COLOR	EAN CODE
LR06-0600	3000K	5310341004427


MODEL	COLOR	EAN CODE
LR09-0100	3000K	5310341004335

MODEL	COLOR	EAN CODE
LR10-0100	3000K	5310341004359

LR09-0120	6400K	5310341004342
-----------	-------	---------------


LR10-0120	6400K	5310341004366
-----------	-------	---------------

WATTS	2x3W	1x6W	1x6W
EQ.WATTS	48W	48W	48W
LUMINOUS FLUX	300 Lm	242 Lm	242 Lm
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
IP RATING	IP54	IP54	IP54
CRI	>80	>80	>80
PCS/CARTON	18 pcs	12 pcs	18 pcs
BEAM ANGLE	/	/	/
COLOR	WHITE	GREY	WHITE
SERIES	CRELEX	CRELEX	CRELEX
LIFETIME	ALUMINIUM	ALUMINIUM	ALUMINIUM





MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LR07-0105	GREY	5310341003239	LR07-0205	GREY	5310341003246	LR13-0105	BLACK	5310341004397

WATTS	1xGU 10	2xGU 10	1xGU 10
EQ.WATTS	/	/	Max 35 W
MATERIAL	/	/	/
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60Hz
CAP-BASE	IP65	IP65	IP65
CRI	>80	>80	>80
PCS/CARTON	27 pcs	18 pcs	18 pcs
PROPERTIES	Ledor	Ledor	/
SUITABLE FOR	GU 10	GU 10	GU 10
SERIES	OUTDOOR	OUTDOOR	CRELEX
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			φ 120 *h 140mm



MODEL	COLOR	EAN CODE
LR14-0105	BLACK	5310341004403




MODEL	COLOR	EAN CODE
LR11-0105	BLUE	5310341004373



MODEL	COLOR	EAN CODE
LR12-0105	BLUE	5310341004380

WATTS	1xGU10		1xGU10	1xGU10
EQ.WATTS	Max 35 W		Max 35 W	Max 35 W
LUMINOUS FLUX	/		/	/
VOLTAGE	220-240 V		220-240 V	220-240 V
FREQUENCY	50-60Hz		50-60Hz	50-60Hz
CAP-BASE	IP65		IP65	IP65
CRI	>80		>80	>80
PCS/CARTON	18 pcs		18 pcs	18 pcs
PROPERTIES	/		/	/
SUITABLE FOR	GU 10		GU 10	GU 10
SERIES	CRELEX		CRELEX	CRELEX
MATERIAL	ALUMINIUM		ALUMINIUM	ALUMINIUM
DIMENSION	L120*W120*H140mm		φ108*h210mm	L108*W108*H120mm



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LR16-1000	3000K	5310341005356	LR17-1000	3000K	5310341005387
LR16-1020	6400K	5310341005363	LR17-1020	6400K	5310341005394
LR16-1050	BLUE	5310341005370	LR17-1050	BLUE	5310341005400

WATTS	16x0.1W	12x0.1W
EQ.WATTS	/	/
LUMINOUS FLUX	50 Lm	45 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
CAP-BASE	IP54	IP54
CRI	>80	>80
PCS/CARTON	24 pcs	50 pcs
PROPERTIES	/	/
SUITABLE FOR	/	/
SERIES	CRELEX	CRELEX
MATERIAL	ALUMINIUM	ALUMINIUM
DIMENSION	L105*W105*H73mm	L71*W71*H55mm



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LR18-1000	3000K	5310341005417	LR19-1000	3000K	5310341005448
LR18-1020	6400K	5310341005424	LR19-1020	6400K	5310341005455
LR18-1050	BLUE	5310341005431	LR19-1050	BLUE	5310341005462

WATTS	16x0.1W	9x0.1W
EQ.WATTS	/	/
LUMINOUS FLUX	50 Lm	30 Lm
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
CAP-BASE	IP54	IP54
CRI	>80	>80
PCS/CARTON	24 pcs	50 pcs
PROPERTIES	/	/
SUITABLE FOR	/	/
SERIES	CRELEX	CRELEX
MATERIAL	ALUMINIUM	ALUMINIUM
DIMENSION	L170*W68*H75mm	L110*W44*H45mm



MODEL	COLOR	EAN CODE
LD02-0150	GREY	5310341003253

LED POWER SUPPLY

The Luxmainer LED Power Supply units are designed with a primary focus on safety and LED lamp protection. By regulating the current that passes through the units, LED unit longevity is ensured with highly reliable protection from short circuits or overheating.

WATTS	15 W
AMPERES	1.2A
INPUT VOLTAGE	220-240 V
FREQUENCY	50-60 Hz
OUTPUT VOLTAGE	12V
PCS/CARTON	250 pcs





MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE
LD02-0250	GREY	5310341003260	LD02-0600	GREY	5310341003277	LD02-1000	GREY	5310341003284

WATTS	25 W	60 W	100 W
AMPERES	2.1A	5A	8.5A
INPUT VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
OUTPUT VOLTAGE	12V	12V	12V
PCS/CARTON	100 pcs	50 pcs	40 pcs



MODEL	EAN CODE
LD02-1500	5310341003291

WATTS	150 W
AMPERES	12.5A
INPUT VOLTAGE	220-240 V
FREQUENCY	50-60 Hz
OUTPUT VOLTAGE	12V
PCS/CARTON	40 pcs



MODEL	EAN CODE	MODEL	EAN CODE	MODEL	COLOR TREMP	EAN CODE
LD02-2000	5310341003307	LD02-2500	5310341003314	LD02-3500	3000K	5310341003321

INPUT VOLTAGE	WATTS	200 W	250 W	350 W
	AMPERES	17.5A	20A	30A
		220-240 V	220-240 V	220-240 V
	FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
	OUTPUT VOLTAGE	12V	12V	12V
	PCS/CARTON	40 pcs	30 pcs	30 pcs

AMPLIFIERS

The Luxmainer RGB three channel Amplifiers increase the load capability and extend the signals of universal RGB controllers. The RGB Amplifier allows any LED products to dim its output from 0 to 100 percent using a PWM circuit.



	MODEL	AMPLIFIER	EAN CODE	MODEL	AMPLIFIER	EAN CODE	MODEL	AMPLIFIER	EAN CODE
	LC09-0100	RGB	5310341003338	LC09-0101	RGB	5310341003345	LC09-0120	RGB	5310341003352
	WATTS	144 W			250 W			100 W	
	INPUT VOLTAGE	12V			12V			12V	
	AMPERES	18A			30A			7A	
	FREQUENCY	50-60 Hz			50-60 Hz			50-60 Hz	
	OUTPUT VOLTAGE	12V			12V			12V	
	PCS/CARTON	100 pcs			100 pcs			100 pcs	
	SERIES	Amplifier			Amplifier			Controller	



MODEL	COLOR	EAN CODE	MODEL	COLOR	EAN CODE	MODEL	AMPER	MAX POWER
LC09-0121	RGB	5310341003369	LC09-0122	RGB	5310341003376	LC10-0120	2A	20 METERS
						LC10-0121	6A	100 METERS

WATTS	200W	300W	300/800W
EQ.WATTS	/	/	/
AMPERES	18A	30A	/
INPUT VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	/	/	/
CRI	/	/	/
PCS/CARTON	100 pcs	60 pcs	200pcs
OUTPUT VOLTAGE	12V	12V	/
SERIES	Controller	Controller	LedStrip Connector 220W

DIMENSION



MODEL	CONTROLLER	MAX POWER
LC10-0122	RGB	20 METERS
LC10-0123	RGB	50 METERS

WATTS	300/800W
VOLTAGE INPUT	220 V
FREQUENCY	50-60 Hz
PCS/CARTON	100pcs
OUTPUT VOLTAGE	220 V
SERIES	Controller for 220V LedStrip
DIMENSION	

CONTROLLERS

The Luxmainer LED Controllers provide a compact package that excels at facilitating lighting controls for RGB and white-light LED fixtures. As a control solution, the Luxmainer LED Controllers allow for control of not only one fixture, but of a whole system, as well as allowing for a control of the change of colors, from a variety of pre-programmed ones.

SENSOR SERIES

Luxmainer's Sensors seek to provide security and energy efficiency, by utilizing various scientific techniques to detect movement. By focusing on detecting movement and body heat, through the utilization of Infrared, radar and motion sensors, the sensor line of products offers reductions in energy-efficiency, as well as a longer life for bulbs.





WITH MOTION
SENSOR

WITH MICROWAVE
SENSOR AND BATTERY



MODEL	COLOR TREMP	EAN CODE	MODEL	COLOR TREMP	EAN CODE	MODEL	COLOR TREMP	EAN CODE
LH30-0500	6400K	5310341003383	LH30-0600	6400K	5310341003390	LM15-0100	/	5310341003406
WATTS	15W		15W		1200W			
EQ.WATTS	100W		100W		/			
LUMINOUS FLUX	900 Lm		900 Lm		/			
VOLTAGE	220-240 V		220-240 V		220-240 V			
FREQUENCY	50-60 Hz		50-60 Hz		50-60 Hz			
IP RATING	IP44		IP44		IP44			
CRI	>80		>80		/			
PCS/CARTON	10 pcs		10 pcs		50 pcs			
COLOR	WHITE		WHITE		WHITE			
LIFETIME	30.000 h		30.000 h		/			
DETECTION RANGE	360°		360°		360°			
PROPERTIES	WITH LED INSIDE		WITH LED INSIDE		/			
DIMENSIONS								



MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE	MODEL	COLOR TEMP	EAN CODE
LM15-0110	/	5310341003413	LM15-0120	/	5310341003420	LM15-0130	/	5310341003437

WATTS	1200 W	1 200 W	1200 W
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
IP RATING	IP44	IP44	IP44
PCS/CARTON	50 pcs	50 pcs	50 pcs
COLOR	WHITE	WHITE	WHITE
DETECTION RANGE	180°	180°	360°

DIMENSION





MODEL	AMPER	EAN CODE	MODEL	AMPER	EAN CODE
LM15-0150	6A	5310341003444	LM15-0160	25A	5310341003451

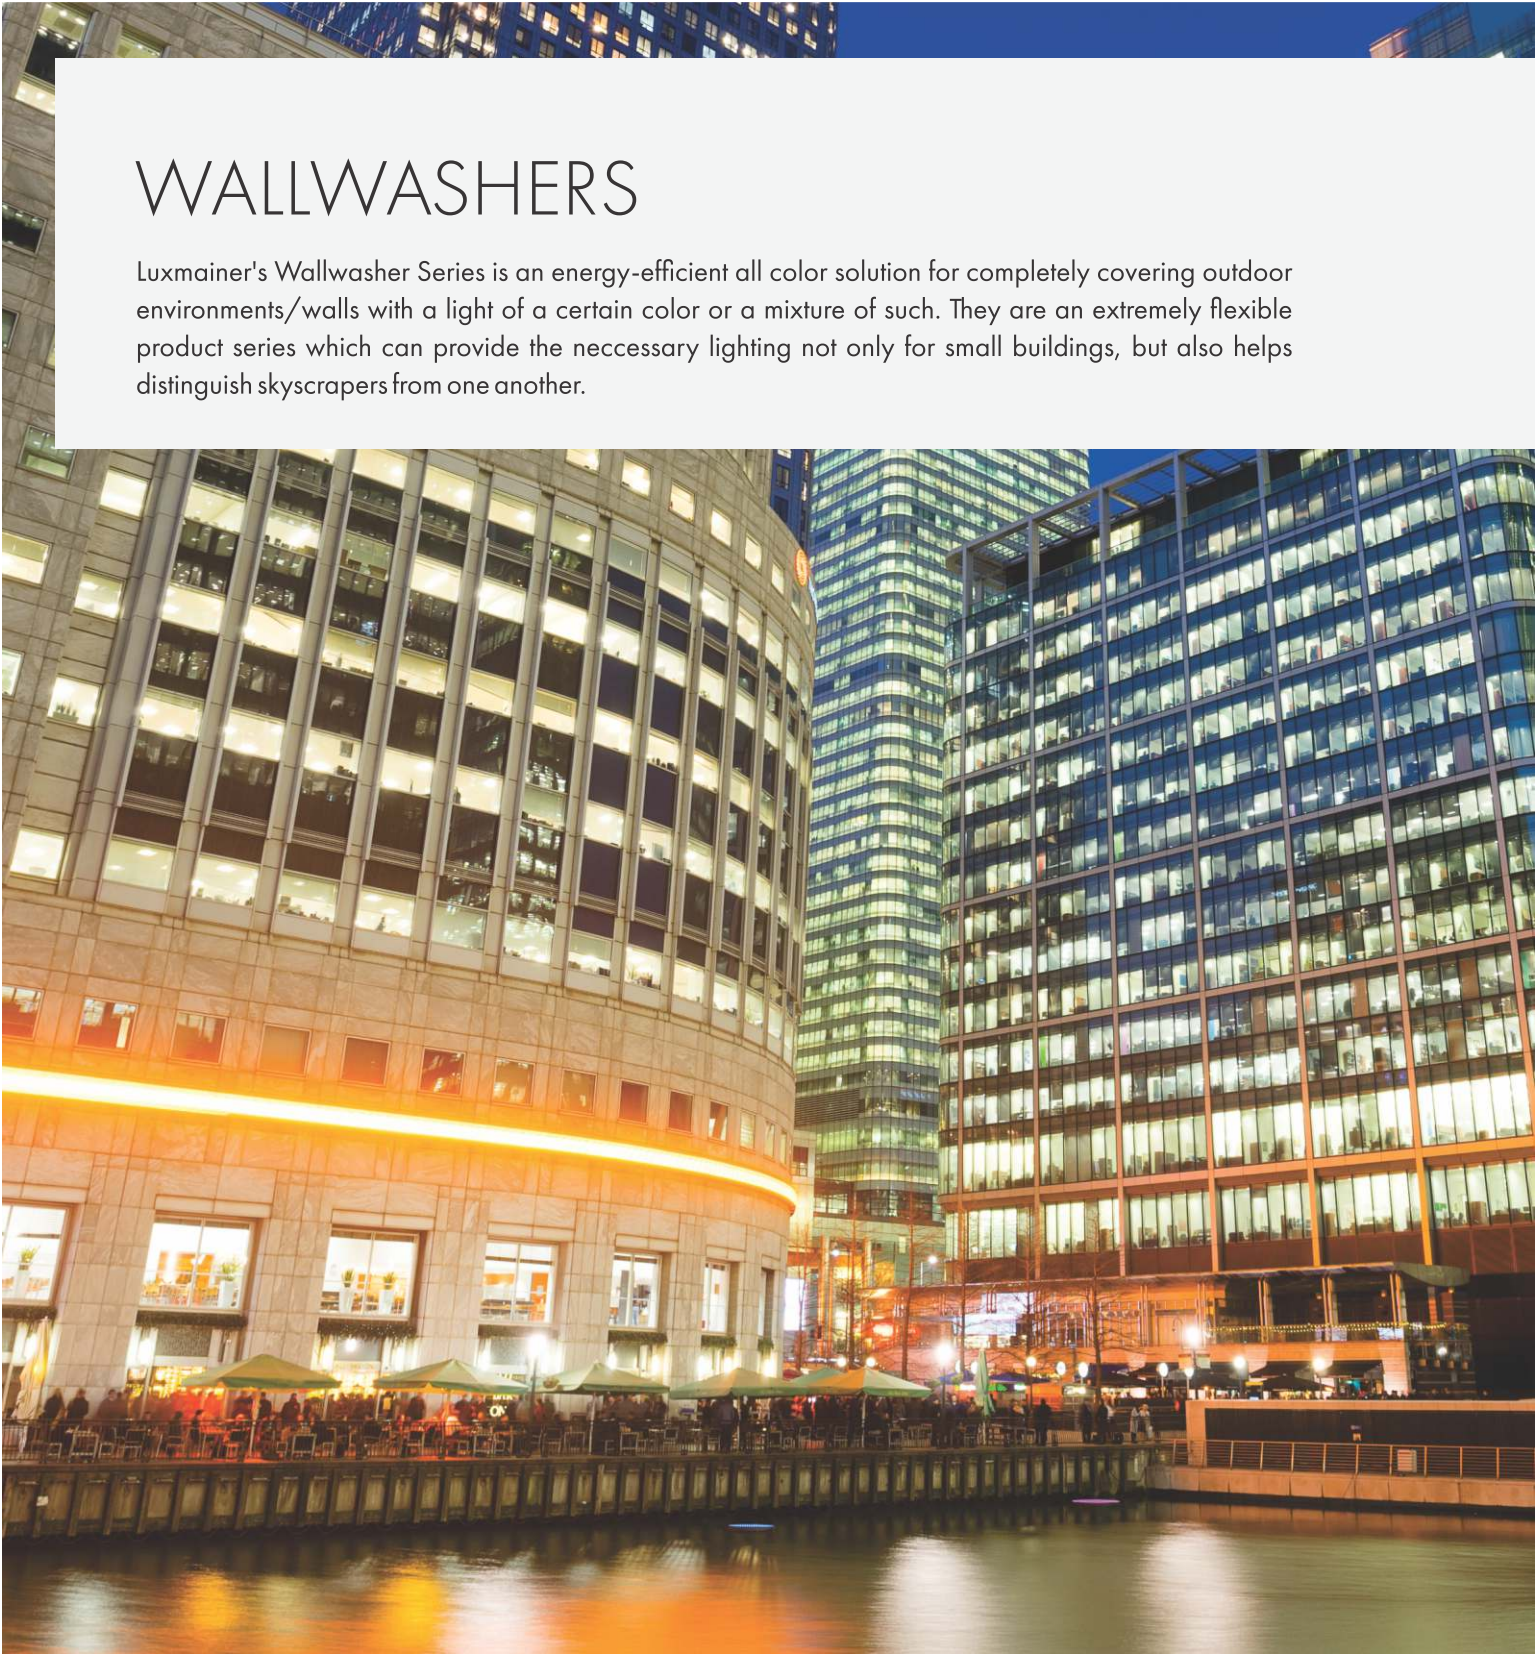
WATTS	1000 W	2000 W
VOLTAGE	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz
IP RATING	IP44	IP44
PCS/CARTON	100 pcs	50 pcs
COLOR	WHITE	WHITE

DIMENSION



WALLWASHERS

Luxmainer's Wallwasher Series is an energy-efficient all color solution for completely covering outdoor environments/walls with a light of a certain color or a mixture of such. They are an extremely flexible product series which can provide the necessary lighting not only for small buildings, but also helps distinguish skyscrapers from one another.



MODEL	COLOR TEMP	LENGTH
WW01-1000	3000K	100 CM
WW01-1010	4000K	100 CM
WW01-1020	6400K	100 CM
WW01-1030	RED	100 CM
WW01-1040	GREEN	100 CM
WW01-1050	BLUE	100 CM
WW01-1060	AMBER	100 CM
WW01-1070	RGB	100 CM



IP	IP65
WATTS	36W
LUMINOUS FLUX	2700Lm
VOLTAGE	220/240V
FREQUENCY	50-60 Hz
CRI	>80
PCS/CARTON	1PCS

DIMENSION 100cm



ECO STREET SERIES

The Luxmainer Eco Street Series seeks to provide a compact lighting solution that is incredibly energy-efficient, and manages to properly enliven a street. Whether that street is a highway or a boulevard, or just a side-street, the Eco Street Series manages to properly fill in every use case.





MODEL		COLOR TREMP	MODEL		COLOR TREMP	MODEL		COLOR TREMP
LS01-5020		5000K	LS01-1020		5000K	LS01-1520		5000K
WATTS		50 W		100 W		150 W		
EQ.WATTS		250W		400W		600W		
LUMINOUS FLUX		5700Lm		11500Lm		17250Lm		
VOLTAGE		220-240 V		220-240 V		220-240 V		
FREQUENCY		50-60 Hz		50-60 Hz		50-60 Hz		
IP		IP65		IP65		IP65		
CRI		>80		>80		>80		
PCS/CARTON		1		1		1		
BEAM ANGLE		60°		60°		60°		
COLOR		GREY		GREY		GREY		
LIFETIME		30.000 h		30.000 h		30.000 h		
DIMENSION								

EMERGENCY LINE

The Emergency Line of Luxmainer products shows up as a stop-gap solution for all unexpected needs of lighting, as well as a solution of comfortable lighting for outdoor areas or as a provider of night-time soft lighting in order to facilitate easier reading.



MODEL	COLOR	EAN CODE
LX01 - 1000	5000K	5310341004571

WATTS	4W
EQ.WATTS	/
LUMINOUS FLUX	/
VOLTAGE	220-240 V
FREQUENCY	50-60Hz
IP RATING	/
CRI	>80
PCS/CARTON	16 pcs
BEAM ANGLE	/
DURATION	3.5 Hours
SERIES	RECHARGEABLE
MATERIAL	ALUMINIUM



MODEL COLOR TREMP

LX01-0400 5000K

MODEL COLOR TREMP

LX01-0500 5000K

MODEL COLOR TREMP

LX01-0600 5000K

LED TYPE	SMD LED	SMD LED	SMD LED
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	/	/	/
CRI	>80	>80	>80
PCS/CARTON	10	10	10
ANGLE	/	/	/
ON/OFF	/	/	/
DURATION TIME	50h	10h	20h

DIMENSION



MODEL	COLOR	EAN CODE
LX01-1100	5000K	5310341004601



MODEL	COLOR	EAN CODE
LX01-1300	5000K	5310341004588



MODEL	COLOR	EAN CODE
LX01-1400	5000K	5310341004625

WATTS	4W	6W	4W
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60Hz	50-60Hz	50-60Hz
CAP-BASE	/	/	/
CRI	>80	>80	>80
PCS/CARTON	150 pcs	6 pcs	20 pcs
PROPERTIES	/	/	/
DURATION	2/4 Hours	11/18 Hours	7 Hours
SERIES	RECHARGEABLE	RECHARGEABLE	RECHARGEABLE
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION			



MODEL		COLOR TREMP	MODEL		COLOR TREMP	MODEL		COLOR TREMP
LX01-0700		5000K	LX01-0800		5000K	LX01-0900		5000K
LED TYPE	SMD LED		SMD LED		SMD LED			
EQ.WATTS	/		/		/			
LUMINOUS FLUX	/		/		/			
VOLTAGE	220-240 V		220-240 V		220-240 V			
FREQUENCY	50-60 Hz		50-60 Hz		50-60 Hz			
CAP-BASE	/		/		/			
CRI	>80		>80		>80			
PCS/CARTON	10		10		10			
ANGLE	/		/		/			
ON/OFF	/		/		/			
DURATION TIME	20 h		20 h		5 h			
DIMENSION								

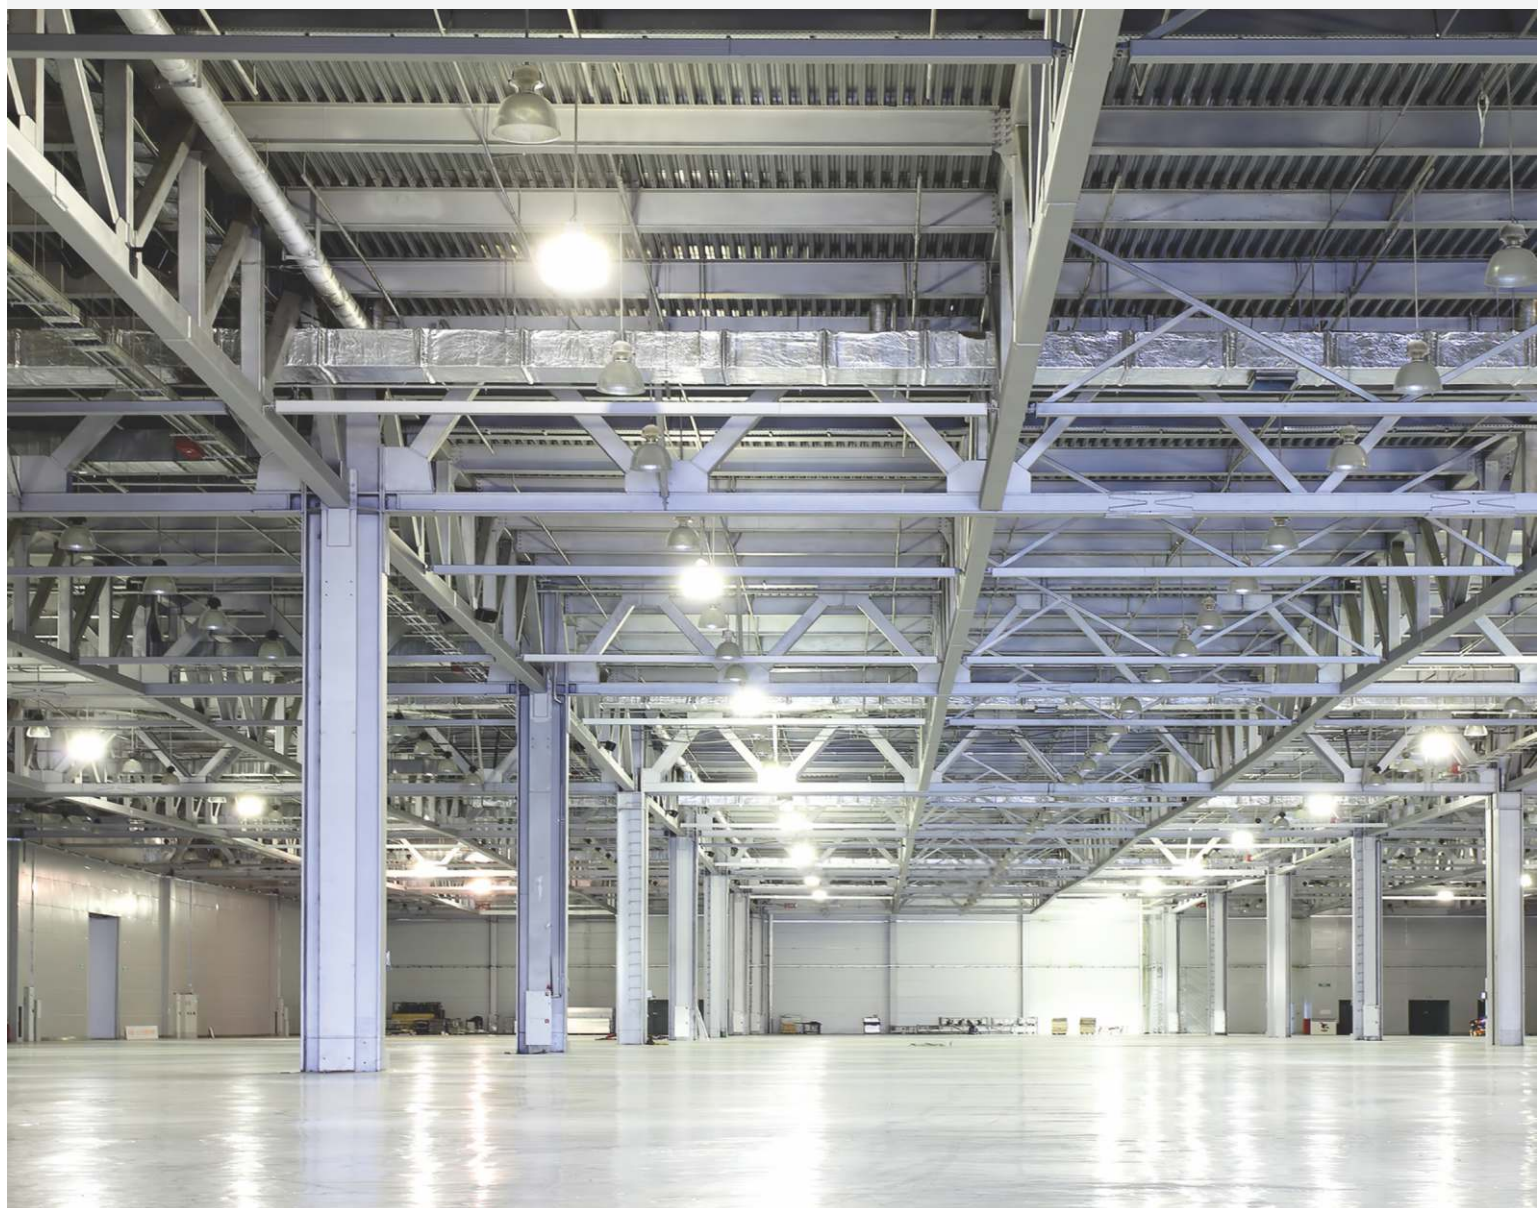


MODEL	COLOR TREMP	MODEL	COLOR TREMP	MODEL	COLOR TREMP
LX01-0100	5000K	LX01-0200	5000K	LX01-0300	5000K

LED TYPE	SMD LED	SMD LED	SMD LED
EQ.WATTS	/	/	/
LUMINOUS FLUX	/	/	/
VOLTAGE	220-240 V	220-240 V	220-240 V
FREQUENCY	50-60 Hz	50-60 Hz	50-60 Hz
CAP-BASE	/	/	/
CRI	>80	>80	>80
PCS/CARTON	/	/	/
ANGLE	/	/	/
ON/OFF	/	/	/
DURATION TIME	10 h	6 h	15 h
DIMENSION			

LED Highbay Series

The Highbay Series is a specially crafted product line which has been purpose built as a lighting solution for objects which have a large height, such as expo halls or warehouses. The incredibly ergonomic design allows it to be pleasant on the eyes, with a neutral light color, as well as a sizeable output which allows filling spacious areas with proper lighting.





MODEL	COLOR	TREMP	MODEL	COLOR	TREMP	MODEL	COLOR	TREMP
LH01-5020	5000K		LH01-1020	5000K		LH01-1520	5000K	
WATTS	50W		100W			150W		
EQ.WATTS	200W		400W			600W		
LUMINOUS FLUX	5000 Lm		10000 Lm			15000 Lm		
VOLTAGE	220-240 V		220-240 V			220-240 V		
FREQUENCY	50-60 Hz		50-60 Hz			50-60 Hz		
IP	IP44		IP44			IP44		
CRI	>80		>80			>80		
PCS/CARTON	1		1			1		
BEAM ANGLE	90°		90°			90°		
COLOR	GREY		GREY			GREY		
LIFETIME	30.000 h		30.000 h			30.000 h		
DIMENSION								

LUXMAINER

This catalog, all the products shown within and all exclusive graphical materials are copyrighted by ©Luxmainer.
Any unauthorized copying or reproduction of this material will lead to criminal and civil liabilities.



www.luxmainer.com